

Ansjer Product Brochure

COMPANY PROFILE

About Ansjer

Zhuhai Ansjer Electronics Co., Ltd. is a professional manufacturer of consumer security monitoring products, focusing on the field of smart home and smart community, with a professional team of independent product research and development, production, sales and service.



The company's marketing and service network covers the world. The company's headquarters is located in Zhuhai, Zhongshan has set up a production base, set up an office in Canada, and set up subsidiaries in the United States, Europe and Hong Kong, China. The global technical support center has been set up in several cities, providing professional security monitoring products and solutions for more than 100 countries and regions in the world. Its exhibition routes cover most of the world's top professional exhibitions, such as IFA Germany, ifsec UK, Miami Consumer Electronics Fair, Hong Kong Electronics Fair and Canton Fair. It has more than 1000 customers from overseas buyers, wholesalers and retailers from North America and Europe.

Since its establishment, Ansjer has been adhering to independent technological innovation, taking technology research and development and personnel training as the company's development goals. The company has set up a professional technology R & D team, which invests 8% of its annual sales revenue into R & D. more than 80% of the R & D Center personnel have bachelor's degree and 10% have master's degree. It has the technical ability to develop core chip applications, such as cloud computing, cloud storage, artificial intelligence and other high-tech R & D integration capabilities. It can provide ODM customization services and meet various personalized software and hardware customization requirements.

The company has passed more than 20 iso9001:2015 quality system certification, smeta social responsibility audit, TUV factory audit and other audits, more than 100 kinds of honorary certificates, more than 40 domestic patents and nearly 100 software copyrights. The company is a member of hevc advance / h.265 patent pool and HDMI high-definition multimedia platform. All products have passed 3C, CE, FCC, UL and other domestic and international certification, in line with ROHS standards and California prop65 standards.

We always follow the enterprise spirit of "people-oriented, leading technology, pursuing win-win and creating safety", and practice the concept of "your safety I guard", provide corresponding personalized services for each customer, and make continuous efforts to create a safe environment for the society.





CATALOGUE

01

Smart IP Security Cameras	
100% Wire-Free Battery Cameras	05
Outdoor Pan & Tilt WiFi Security Cameras	15
Outdoor Bullet WiFi Security Cameras	29
Indoor WiFi Security Cameras	35

02

Network Security Camera System	
Crystal-clear 4MP PoE Cameras	51
Aurora Lux 3K True Night Color PoE Camera	55
Advance Detection Pan & Tilt 5MP PoE Cameras	57
Upgraded AI-Powered 5MP/4K PoE Cameras	59

03

Wireless Security Camera System	
2.4GHz WiFi Security Camera System ...	64
Battery WiFi Security Camera System	69
WiFi Halow™ Security Camera System ...	73
Pan & Tilt WiFi 6 Security and Surveillance System	76
Aurora Lux WiFi 6 Camera System	78

04

Smart AI DVR	
AI DVR System ...	81

05

Brand	
Loccam	85

100% Wire-Free Battery cameras

ZOSI battery-powered cameras are 100% wire-free! They are powered by long-lasting rechargeable batteries and with external solar panels for 24/7 non-stop power. No cords, no wiring required and no more installation restrictions. With a portable, wire-free, hassle-free and all-weather design, suitable for outdoors and indoors use.



Pan & Tilt WiFi Battery Camera

C291 WiFi

Experience worry-free security with this WiFi camera's long-lasting battery and solar panel compatibility. With panoramic coverage, human tracking, and two-way audio, it's built to keep you connected and in control, wherever you are.





 Large-Capacity battery for long-lasting power

 Solar panel support for eco-friendly recharging

 Detects and follows human movement

 Remote monitoring & two-way audio

 Pan and tilt, 355° horizontal & 140° vertical viewing angle

 IP66 Waterproof rating to withstand harsh conditions



C291 WiFi



Camera	Sensor Type	1/2.7" sensor
	Sensor Pixels	4MP
	Lens Interface	M12
	Lens	4.0mm@F1.6
	Angle of View	90°
	Pan & Tilt	Pan: 0-355° Tilt: 0-90° Two preset points
	Light Board	2 dual light LEDs (IR/white light)
	Night Vision Mode	Black and white night vision, colour night vision
	Infrared Wavelength	850nm
	Night Vision Distance	15m
	Illumination Threshold	Soft light sensitivity: day to night < 2Lux; night to day > 4Lux
	Day/Night Conversion Mode	ICR IR Filter Type
	Signal-to-noise ratio	49dB
	Digital Noise Reduction	3D DNR
	Backlight Compensation	Yes
Port/Button	Glare Suppression	Yes
	Two-Way Audio	Support, Full Duplex
	Audio Pickup Distance	6m
	Motion/Human Detection	Yes
	Wired Network Port	No
PIR	Storage	Support Micro SD card(≤256G)/Cloud storage
	Audio Input/Output	Built-in high sensitivity microphone/Built-in speaker
	Buttons	Reset button and on/off button
	Indicator Lights	1 network indicator, 1 charging indicator
	Detection Distance	8m
Alarm	Adjusting Gears	1 to 10
	Wake-up Call	1.85S
	Alarm Detection	Motion Detection, PIR Detection, Human Detection
Compression Standard	Trigger Conditions	PIR
	Alarm Recording/One Touch Alarm	Yes
	Video Compression Standard	H.265
	Video Compression Rate	32Kbps~2Mbps
Image	Audio Compression Standard	G.711A
	Maximum Image Size	2560 x1440
	Frame Rate/Image Settings	15fps/Support HD/SD; support mirroring
Wi-Fi	Privacy Masking	Yes
	Wireless Standards/Frequency Range	IEEE 802.11b/g/n 1T1R/2.4 GHz
Network Settings	Channel Bandwidth	20MHz
	Network/Distribution Method	2.4GHz WiFi Only/AP hotspot distribution/scanning distribution
Power Supply	Protocol/Voice Assistant	IPV4, HTTPS, TCP/IP, DHCP, MQTT, DNS, P2P, RTSP/Alexa is not supported
	Battery Capacity/Standby Current	7800mAh/870uA
	Operating Current/Power Specification	370mA/DC 5V
	Maximum Power Consumption	≤4.5W
General	Material/Dimension/Weight	Plastic housing/160×135×160/≤0.6kg
	Operating Temperature & Humidity	-20 C ~50 C , humidity <90% (no condensation)

Pan & Tilt 4G LTE Battery Camera

C291 4G

This 4G LTE camera offers off-grid monitoring with a cellular subscription plan for unlimited data. Combined with long-lasting power, panoramic views, and smart tracking, it's built for reliable protection in remote locations.



4G Work on 4G LTE network, ideal for remote locations with no WiFi or power

Large-Capacity battery for long-lasting power

Detects and follows human movement

Pan and tilt, 355° horizontal & 140° vertical viewing angle

Solar panel support for eco-friendly recharging

Remote monitoring & two-way audio



C291 4G



Camera	Sensor Type	1/2.7" sensor
	Sensor Pixels	4MP
	Lens Interface	M12
	Lens	4.0mm@F1.6
	Angle of View	90°
	Pan & Tilt	Pan: 0-355° Tilt: 0-90° Two preset points
	Light Board	2 dual light LEDs (IR/white light)
	Night Vision Mode	Black and white night vision, colour night vision
	Infrared Wavelength	850nm
	Night Vision Distance	15m
	Illumination Threshold	Soft light sensitivity: day to night < 2Lux; night to day > 4Lux
	Day/Night Conversion Mode	ICR IR Filter Type
	Signal-to-noise ratio	49dB
	Digital Noise Reduction	3D DNR
	Backlight Compensation	Yes
Port/Button	Glare Suppression	Yes
	Two-Way Audio	Support, Full Duplex
	Audio Pickup Distance	6m
	Motion/Human Detection	Yes
	Wired Network Port	No
PIR	Storage	Support Micro SD card(≤256G)/Cloud storage
	Audio Input/Output	Built-in high sensitivity microphone/Built-in speaker
	Buttons	Reset button and on/off button
	Indicator Lights	1 network indicator, 1 charging indicator
	Detection Distance	8m
Alarm	Adjusting Gears	1 to 10
	Wake-up Call	1.85S
	Alarm Detection	Motion Detection, PIR Detection, Human Detection
Compression Standard	Trigger Conditions	PIR
	Alarm Recording/One Touch Alarm	Yes
	Video Compression Standard	H.265
	Video Compression Rate	32Kbps~2Mbps
Image	Audio Compression Standard	G.711A
	Maximum Image Size	2560 x1440
	Frame Rate/Image Settings	15fps/Support HD/SD; support mirroring
	Privacy Masking	Yes
Wi-Fi	LTE-FDD	CN:B1/B3/B5/B8 EU:B1/B3/B5/B8/B20/B28
	LTE-TDD/GSM	CN:B34/B38/B39/B40/B41 EU:NULL/CN: B3/ 8 EU: B2/ 3/ 5/ 8
	Network/Distribution Method	4G LTE/Scan to Add
Network Settings	Protocol/Voice Assistant	IPV4, HTTPS, TCP/IP, DHCP, MQTT, DNS, P2P/Alexa is not supported
	Battery Capacity/Standby Current	7800mAh/870uA
	Operating Current/Power Specification	370mA/DC 5V
Power Supply	Maximum Power Consumption	≤4.5W
	Material/Dimension/Weight	Plastic housing/160×135×160/≤0.6kg
	Operating Temperature & Humidity	-20 C ~50 C , humidity <90% (no condensation)

Smart WiFi Battery Camera

C1 Pro

Stay charged and stay powered, no strings attached. It is compact in size and flexible in installation using magnetic or screw on bracket mounting. C1 Pro can also be simply placed on any flat surfaces.



3MP 3MP HD pixels for clearer images quality

Light & Siren alarm, proactive defense

Built-in rechargeable battery, suitable for indoors and outdoors use

PIR Motion detection & Person detection, capturing suspicious precisely

Supports charging with external green & energy-saving solar panel

Two-Way audio, easy intercom anytime, anywhere



C1 Pro




Camera	Sensor Type	1/2.9" CMOS
	Sensor Pixels	3MP
	Minimum Illumination	0 Lux (infrared light on)
	Lens	3.6mm @ F2.0 90°
	Wide Dynamic Range	Digital wide dynamic range
	Day And Night Conversion Mode	ICR infrared filter type
	Night Vision Mode	Black and white night vision (default), color night vision
	Infrared Light	9PCS
	Infrared Distance	15 meters
	Warm Light	2PCS
Video	Image Settings	Supports high-definition/standard-definition; supports picture flip
	Video Compression Standard	H.265 Main Profile
	Compression Output Rate	32Kbps~2Mbps
	Resolution	2304 × 1296
	Stream Type	Variable bitrate
	Dual Stream	Live high-definition broadcasting, video playback (main stream), video standard-definition broadcasting (sub-stream)
	Frame Rate	20 frames
Audio	Audio	Two-way voice
	Audio Compression Standard	G.711a
	Storage	Supports SD card (Max. 128G), cloud storage (7 days of free cloud storage in China for 3 months, 1 month of free cloud storage overseas)
Network	Network Interface Protocol	Private
	Communication Protocol	IPv4, TCP/IP, DHCP, DNS, MQTT, P2P
	Frequency Range	2.4G Hz
	Wireless Standard	IEEE802.11b/g/n
Intelligent Alarm	Intelligent Alarm Trigger Wake-up	PIR
	Intelligent Detection	Motion detection and human form alarm
	Detection Sensitivity	PIR (1-10, default 8), motion detection (1-10, default 6)
	Remote Wake-up	Supports manual wake-up
	Image Output Time	Within 2s
	Alarm Video	Can be set to record for 10S, 20S, 30S independently
	Information Push	Supports mobile phone and tablet APP alarm push
	Battery Sleep	Can independently set the sleep state time, 10S (default), 20S, 30S, not sleep
Battery	Working Time	6 months (10 wake-ups per day)
	Standby Current	200uA
	Operating Current	200mA (420mA under night vision)
	Battery Capacity	6700mAh (rechargeable)
	Power Supply	DC 5V/1A
General	One-click Reset	Support
	Working Temperature And Humidity	-20 C to 55 C , humidity less than 90% (non-condensing)
	Protection Level	IP66
	Dimensions (mm)	52mm x 65mm x 102mm
	Weight (g)	≤0.268kg (bare machine)


Smart WiFi Removable Battery Camera

C306 Pro

Ansjer large-capacity battery camera excels in battery life. In addition, the battery is removable and can be charged alone. Simple to install, this camera can be used anywhere, providing 24/7 reliable video recording in crisp 2K resolution.




 3MP HD pixels for clearer images quality

 Removable high-capacity battery, more convenient to replace

 Supports charging with external green & energy-saving solar panel

 Light & Siren alarm, proactive defense

 PIR Motion detection & Person detection, capturing suspicious precisely

 Two-Way audio, easy intercom anytime, anywhere



C306 Pro



Camera	Sensor Pixels	3MP
	Sensor Type	1/2.9" CMOS
	Minimum Illumination	0 Lux (infrared light on)
	Lens	3.6mm @ F2.0 90°
	Wide Dynamic Range	Digital wide dynamic range
	Day And Night Conversion Mode	ICR infrared filter type
	Night Vision Mode	Black and white night vision (default), full-color night vision
	Infrared Light	6PCS
	Infrared Night Vision Distance	15 meters
	Warm Light	1PCS
Video	Image Settings	Supports HD/SD; supports image flip
	Video Compression Standard	H.265 Main Profile
	Compression Output Rate	32Kbps~2Mbps
	Resolution	2304 × 1296
	Stream Type	Variable bitrate
	Dual Stream	Live HD broadcast, video playback (main stream), live SD broadcast (sub-stream)
	Frame Rate	20 frames
Network	Audio	Two-way voice
	Audio Compression Standard	G.711a
	Interface Protocol	Private
	Communication Protocol	IIPV4, TCP/IP, DHCP, DNS, MQTT, P2P
	Frequency Range	2.4G Hz
Smart Alarm	Wireless Standard	IEEE802.11b/g/n
	Trigger Wake-up	PIR, APP active wake-up
	Smart Detection	Motion detection and human shape alarm
	Detection Sensitivity	PIR (1-10, default 8), motion detection (1-10, default 6)
	Remote Wake-up	Supports manual wake-up and APP
	Image Output Time	Within 2s
	Alarm Recording	Alarm recording, can be set to record for 10s, 20s, or 30s
	Alerts Push	Supports mobile phone and tablet APP alarm push
Battery	Sleep	Can be set to enter sleep mode independently, 10s (default), 20s, 30s, or no sleep
	Working Time	6 months (10 wake-ups per day)
	Standby Current	200uA
	Operating Current	200mA (420mA in night vision mode)
	Battery Capacity	7800mAh (rechargeable)
	Power Supply	DC 5V/1A
	One-click Reset	Supported
General	Working Temperature And Humidity	-20 C to 55 C , humidity less than 90% (no condensation)
	Protection Level	IP66
	Dimensions (mm)	177mm x 113mm x 151mm
	Weight (g)	≤0.426kg (bare machine)



Outdoor Pan & Tilt WiFi Security Cameras

Compared with traditional wired cameras, Ansjer Outdoor PT Cameras can rotate in different directions and capture details in every corner with no blind spots. They not only have high-gain dual-band WiFi antennas for reliable remote access anytime, anywhere, but also have a all-weather protected design for 24/7 video and audio recording.









Starlight Outdoor Pan & Tilt WiFi Security Camera - WiFi Connection

C289 WiFi

The innovative AI algorithm detection PT camera is equipped with a high-performance starlight sensor and f/1.6 large aperture lens, capturing more lights to make your night brighter and clearer, providing safe guarding during day & night.



-  355° Pan & 140° Tilt wide viewing angle
-  Smart AI Person/Vehicle/Package/Pet detection
-  Intelligent auto- tracking, accurate locking of suspicious people
-  IP66 waterproof, easily handle with all kinds of outdoor weather
-  Starlight night vision, capturing color images in low light scenes
-  Two-Way audio, easy intercom anytime, anywhere



C289 WiFi



Camera	Camera Pixel	2MP
	Sensor Type	1/2.7" Progressive Scan CMOS
	Shutter	Shutter adaptive
	Lens	4.0mm @ F1.6
	Lens Interface Type	M12
	Minimum Illumination	OLux (infrared light on)
	Day And Night Conversion Mode	ICR infrared filter type
	Warm Light	4PCS patch
	Infrared Distance	4PCS, effective night vision up to 30 meters
Compression Standard	Video Compression Standard	H.265 Main Profile
	Video Compression Bit Rate	Two modes of HD and SD, adaptive bit rate
	Audio Compression Standard	G.711A
Image	Maximum Image Size	1920x1080, supports dual stream
	Frame Rate	15fps, adaptive frame rate according to network transmission
	Image Settings	Supports HD/SD, supports image mirroring mode
PTZ	Rotation Speed	13°/s
	Horizontal Viewing Angle	0~355°
	Vertical Viewing Angle	0~140°
Performance	Intelligent Alarm	Intelligent motion detection, human detection, alarm push
	AI Algorithm (cloud)	Face detection, vehicle detection, pet detection, package detection
	Speaker	Support
	Microphone	Support
	Image Mirroring	Support (supported by the APP)
	Cruise	Support
	Inter-point Cruise	Support
	Digital Noise Reduction	3D digital noise reduction
	Wide Dynamic Range	Support
	Backlight Compensation	Support
	Strong Light Suppression	Support
	Protocol Support	IPv4 DHCP ,ONVIF, TCP/IP ,NTP, RTSP,P2P
	Network Status Indication	1 (network connection status indication)
	Maximum Preview Users	5
WiFi	Antenna	23dB antennas
	Frequency Range	2.4 GHz ~ 2.4835 GHz
	Channel Bandwidth	Supports 20MHz
	Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps
General	Storage	Supports up to 128G (TF card)
	Working Temperature And Humidity	-10 C to 60 C , humidity less than 95% (non-condensing)
	Power Supply	DC12V±10%
	Reset Button	Support
	Power Consumption	8W MAX
	Protection Level	IP66 (waterproof and dustproof)
	Size (mm) / Weight	146mm x 98mm x 165.5mm / ≤0.458kg (bare machine)

2.5K Pan & Tilt WiFi Camera

C290

Equipped with a powerful sensor, it transforms nighttime into vibrant colorful visuals. Embrace our starlight sensor and AI algorithm fusion, redefining the possibilities of nighttime monitoring with a heightened sense of clarity and insight.



4MP 4MP HD quality for stunning detail

Effortless two-way audio communication anytime, anywhere

Intelligent human tracking for pinpoint precision

Advanced person/vehicle detection, and human tracking

355° Pan & 140° Tilt wide viewing angle

Proactive defense with intelligent light and siren deterrence



C290 WiFi



Camera	Camera Pixel	4MP
	Sensor Type	1/2.7" Progressive Scan CMOS
	Shutter	Adaptive shutter
	Lens	4.0mm @ F2.0
	Lens Interface Type	M12
	Minimum Illumination	OLux (infrared light on)
	Day And Night Conversion Mode	ICR (Infrared-Cut Removable)
Compression Standard	Night Vision Distance	2pcs infrared lights, 32ft (10M)
	Video Compression Standard	H.265/H.265+ Main Profile
	Video Compression Bitrate	HD/SD, adaptive bitrates
	Audio Compression Standard	G.711A
Image	Maximum Image Size	2560x1440, support dual-stream
	Frame Rate	25fps, Network transmission frame rate adaptive
	Image Settings	Supports HD/SD switching, image mirroring
PTZ	Rotation Speed	13°/s
	Horizontal Viewing Angle	0~360°
	Vertical Viewing Angle	0~95°
Performance	Smart Detection	Motion detection, Human-figure detection, human tracking, vehicle detection
	Speaker	Supported
	Microphone	Supported
	Mirroring	Supported (can be set through the App)
	Pan and Tilt	Supported
	Point-to-Point Cruise	Supported
	Digital Noise Reduction	3D digital noise reduction
	Wide Dynamic Range	D-WDR
	Backlight Compensation	Supported
	Strong Light Suppression	Supported
	Software	AVSS (PC/MacBook)
	Protocol	IPv4; TCP; UDP; RTSP; RTP; DHCP; NTP;
	Network Status Indicator	1 indicator for network connection status
General	Maximum Preview Users	10
	Storage	Max. 128GB (Mirco SD card)
	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Power Supply	DC12V±10%
	Power Interface	DC12V/1A
	Reset Button	Supported
	Power Consumption	12W MAX
	Ingress Protection	IP66 (waterproof and dustproof)
	Dimensions (mm)	115*137*188mm
	Weight (g)	700g

3K Dual Lens Hybrid Zoom Camera

C292

This 3K dual-lens hybrid zoom marvel rotate 355° horizontally and 140° vertically for a panoramic view, eliminating blind spots. Offering up to 8x hybrid zoom, it guarantees comprehensive coverage across various distances, ensuring clarity both up close and at a distance. With f/1.6 aperture and starlight sensors, it delivers exceptionally finely-detailed visuals, excelling even in low-light conditions



- 5MP

5 megapixels resolution, excelling in low-light environments
- 8x


8x hybrid zoom for comprehensive coverage at varying distances
- 355°

355° Pan & 140° Tilt wide viewing angle
- Siren

Powerful siren deterrence
- AI

AI detection for humans, vehicles, faces, and unusual sounds
- Voice

Bidirectional voice communication, ensuring real-time interaction

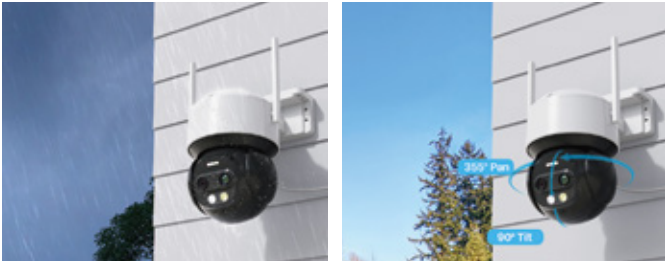

C292




Camera	Camera Pixel	5MP
	Sensor Type	1/2.7" CMOS + 1/2.7" CMOS
	Shutter	Adaptive shutter
	Lens	2.8mm@ F1.6, diagonal viewing angle: 128°, horizontal angle: 110°, vertical angle: 59° + 12mm@ F1.6, diagonal viewing angle 30°, horizontal angle: 25°, vertical angle: 14°
	Lens Interface Type	M12
Image	Digital Noise Reduction	3D Digital Noise Reduction
	Wide Dynamic Range	D-WDR
	Day/Night Mode	ICR (Infrared-Cut Removable)
	Night Vision Distance	4pcs, 30m
	Video Compression Standard	H.265/H.264
PTZ	Video Compression Bitrate	HD/SD, adaptive bitrates
	Audio Compression Standard	G.711A
	Maximum Image Size	2688x1520, support dual-stream
	Frame Rate	25fps, Network transmission frame rate adaptive
	Image Settings	Brightness, contrast, saturation, etc.
Features	Rotation Speed	13°/S
	Pan	0 ~ 350°
	Tilt	0 ~ 95°
	Zoom	8xAI hybrid zoom
	Smart Detection	Motion detection, Human-figure detection, human tracking, local detection: vehicle/human face/audio anomaly
Network	Speaker	Supported
	Microphone	Supported
	Mirroring	Supported
	Cruise	Supported
	Point-to-Point Cruise	Supported
General	Backlight Compensation	Supported
	Strong Light Suppression	Supported
	Protocol	Onvif,NTP
	Network Status Indicator	1 indicator for network connection status
	Maximum Preview Users	5
Storage	Antenna	Two 5dB antennas
	Wireless Standards	IEEE802.11b, 802.11g, 802.11n
	Frequency Range	2.4 GHz ~ 2.4835 GHz
	Channel Bandwidth	20MHz
	Transmission Rate	11b: 11Mbps,11g :54Mbps,11n :150Mbps
General	Storage	Micro SD card (max. 512GB)
	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Power Supply	DC12V±10%
	Reset Button	Supported
	Power Consumption	24W MAX
General	Ingress Protection	IP66 (waterproof and dustproof)


Pan & Tilt WiFi 6 Camera

C296B

Step into a world of unrivaled security with the C296B High-Definition Wi-Fi 6 PT Surveillance Camera. Immerse yourself in stunning clarity that captures every detail with precision. Powered by Wi-Fi 6 technology, enjoy lightning-fast and rock-solid connectivity. Engage in real-time two-way audio conversations through your mobile devices, no matter where you are. The advanced AI is a game-changer. It offers accurate pet detection, flame detection, and face detection. Choose the C296B High-Definition Wi-Fi 6 PT Surveillance Camera and experience security redefined.





 WiFi 6 for fast, reliable connectivity

 Human tracking automatically follows movement

 5MP/8MP ultra HD image

 Remote monitoring with two-way talk

 Upgraded AI detects humans, zones, pets, faces, and flames

 Pan and tilt, 355° horizontal & 140° vertical viewing angle



C296B



Camera	Camera Pixel	4MP/(8MP)
	Sensor	1/2.7" Progressive Scan CMOS/1/2.8" Progressive Scan CMOS
	Lens	Focal length 4.0mm Aperture F1.0
	Viewing Angle	Horizontal 90°
	Lens Interface	M12
	Light Board	6pcs of IR lights 4pcs of White lights
	P & T	Horizontal rotation Angle: 355° Vertical rotation Angle: 140°
	Infrared Wavelength	850nm
	Night Vision Distance	30m
	Illuminance Threshold	Soft light sensitivity: daytime to nighttime < 2Lux; nighttime to daytime > 4Lux
	Day-night Switching Mode	ICR infrared filter
	Night Vision Mode	Black and White Night Vision/ Color Night Vision/ Smart Night Vision
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Yes
	Strong Light Suppression	Yes
AI Algorithm	Privacy Masking/Sound & Light Alarm	Supports customization of 5 zones/Yes
	Customized Alarm Voice/One-Click Alarm	Yes/Yes
	Two-Way Audio/Human Tracking	Yes/Yes
	Motion Detection/Human Detection	Yes/Yes
	Vehicle Detection/Area Invasion	Yes/Yes
	Area Departure/Unmanned Detection	Yes/Yes
	Face Detection	Yes
	Abnormal Noise Detection/Pet Detection	Yes/Yes
	Traffic Detection	Yes
	Passenger flow statistics	Yes(When traffic detection is in effect)
Perf/Button	Wandering Detection	Yes
	Flame Detection	Yes
	Cloud AI	Human/Vehicle/Pet/Package Detection(overseas version only)
	Wired Network Port	Yes
	Storage/Buttons	Micro SD Card (<256G) Cloud Storage NVR /Reset button
Compression Standard	Audio Input/Audio Output	Built-in high sensitivity microphone/Built-in speaker
	Video Compression Standard	H.264/H.265 Main Profile
Image	Audio Compression Standard	G.711A
	Maximum Image Size	2880x1620(3840x2160)
WiFi	Frame Rate/Image Settings	25fps(20fps) / Support HD/SD; support mirroring
	WiFi Standard/Frequency Range	IEEE802.11b/g/n/ax / 2.4 GH
	Channel Bandwidth/Antenna	20MHz / 2 x 5dBi antennas
General	Networking Modes/Protocol	AP config/ Wired Connection / TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, RTSP
	Material/Waterproof	Metal front shell, plastic body / IP66
	Working Temperature & Humidity	-10 C -60 C ,humidity <95%(no condensation)
	Power Supply	DC12V/1A
	Size	Wall mounting: 160mm (L) x 140mm (W) x 240mm (H)
	Weight	0.61kg(bare)

Aurora Lux WiFi 6 Camera

C296A

Experience unmatched clarity with the Aurora Lux camera. Its F1.0 aperture, 1/1.79" super large sensor, and advanced AI-ISP technology provide vibrant, true-color images in ultra-low light. Equipped with a powerful 4.0 TOPS NPU for intelligent image perfection and precise detection, it elevates your night vision experience to an entirely new level.



- WiFi 6 technology for uninterrupted connectivity
- 24/7 True color images in extremely low light
- Pan and tilt, 355° horizontal & 140° vertical viewing angle

- Advanced AI for human, vehicle, and area detection
- Automatic human tracking
- Remote access from anywhere, anytime



Camera	Camera Pixel	4MP/(8MP)
	Sensor	1/2.7" Progressive Scan CMOS/1/2.8" Progressive Scan CMOS
	Lens	Focal length 4.0mm Aperture F1.0
	Viewing Angle	Horizontal 90°
	Lens Interface	M12
	Light Board	4 White lights
	Fill Light Control Mode	Three modes: automatic on (follow the light intensity automatically turn on/off the fill light), forced to turn on or forced to turn off the light, timed to turn on/off the fill light (you can set the start and end time)
	Brightness	Two modes: automatic adjustment, manual adjustment
	Lamp Power	1W
	Lamp Flux/Lamp Temperature	140lm(lumen)/4500K
	P&T	Horizontal rotation angle: 355° Vertical rotation angle: 140°
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Yes
	Strong Light Suppression	Yes
	Privacy Masking/Sound & Light Alarm	Supports customization of 5 zones/Yes
AI Algorithm	Customized Alarm Voice	Yes
	Two-Way Audio/Human Tracking	Yes/Yes
	One-Click Alarm	Yes
	Motion Detection	Yes
	Human Detection	Yes
	Vehicle Detection	Yes
	Area Invasion	Yes
	Area Departure	Yes
Port/Button	Unmanned Detection	Yes
	Traffic Detection	Yes
	Wandering Detection	Yes
	Cloud AI	Human/Vehicle/Pet/Package Detection(overseas version only)
Compression Standard	Wired Network Port	Yes
	Storage/Buttons	Micro SD Card (<256G) Cloud Storage NVR /Reset button
	Audio Input/Audio Output	Built-in high sensitivity microphone/Built-in speaker
Image	Video Compression Standard	H.264/H.265 Main Profile
	Audio Compression Standard	G.711A
WiFi	Maximum Image Size	2880x1620(3840x2160)
	Frame Rate/Image Settings	25fps(15fps) / Support HD/SD; support mirroring
	WiFi Standard/Frequency Range	IEEE802.11b/g/n/ax / 2.4 GH
	Channel Bandwidth/Antenna	20MHz / 2 x 5dB antennas
General	Networking Modes	AP config/ Bleconfig/ Code scanning config
	Protocol	TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, RTSP
	Material/Waterproof	Plastic casing / IP66
	Working Temperature & Humidity	-10 C -60 C ,humidity <95%(no condensation)
	Power Supply	DC12V/1A
	Size	Wall mounting: 160mm (L) x 140mm (W) x 240mm (H)
	Weight	0.61kg(bare)

Dual-Lens WiFi 6 Camera

C298

Upgrade your surveillance with C298 dual-lens camera. Combining panoramic view and close-up detailed view in one device, it delivers 4MP+4MP clarity, this camera offers smooth connectivity and smart AI for accurate detection and tracking. The C298 dual-lens camera is truly a cut above the rest, offering a unique combination of features that make it an essential addition to any surveillance system. Upgrade today and experience a new level of security and clarity.



WiFi 6 for fast, reliable connectivity

Dual camera in one for both panoramic and close-up views

4MP 4MP+4MP resolution for ultra clear video

Pan and tilt, 355° horizontal & 140° vertical viewing angle

AI person, vehicle, and area detection

Smart human tracking



Camera	Camera Pixel	16:9 3.08MM 2560×1440
	Sensor Type	1/2.9" Progressive Scan CMOS
	Lens	3.08mm Focal length, Zoom type: fixed focus, Aperture control: fixed aperture F1.6
	Field of View	Horizontal 110° Vertical 60° Diagonal 135°
	Lens Interface Type	M12
	Minimum Illumination	0.01 Lux (color mode), 0 Lux (infrared light on)
	Infrared Lights / Warm Lights	4pcs high-power LEDs, 850nm, 14 mil / 2pcs
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 100ft (30m)
	Frame Rate	Max. 15fps, Network transmission frame rate adaptive
	Dual Stream	Main stream: 4MP (2560×1440), Sub-stream D1 (640×360)
PT Camera	Resolution / Image Sensor	2MP 1920×1080 / 1/2.9" Progressive Scan CMOS
	Lens Interface Type / Field of View	M12 / Horizontal 43° Vertical 24° Diagonal 50°
	Lens	8.0mm Focal length, Zoom type: fixed focus, Aperture control: fixed aperture F2.0
	Minimum Illumination	M12
	Image Mirroring	0.01 Lux (color mode), 0 Lux (infrared light on)
	Infrared Lights / Warm Lights	6pcs high-power LEDs, 850nm, 14 mil / 4pcs
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 100ft (30m)
	Frame Rate	Max. 15fps, Network transmission frame rate adaptive
	Dual Stream	Main stream: 2MP (1920×1080), Sub-stream D1 (640×360)
	Video Compression Standard / Bitrate	H.265/H.265+ Main Profile / 32Kbps~2Mbps
Video	Privacy Area Setting	Supported (up to 4 areas)
	Region of Interest (ROI)	Supported
	Image Settings	Supports HD/SD switching, image mirroring
Audio	Audio Input / Output	Built-in microphone/speaker
	Audio Compression Standard	G.711A
Performance	White Balance / Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Supported
	Dynamic Range / Signal-to-Noise Ratio	81dB / 38dB
Network	Strong Light Suppression	Supported
	WiFi / Protocol	Automatic / TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, onvif
	Software / Maximum Preview Users	ZOSI Smart (Android/IOS) / 5
	Wired	10/100Mbps Ethernet port (RJ45)
Common Features	Smart Detection	Motion/human/vehicle/intrusion/sound anomaly/pet/package detection
	Human Tracking / Audio	Supported / Two-way audio (full duplex) for PT camera
	Night Vision Type	Black and white night vision, full color night vision, smart night vision
	Recording Types	Continuous recording, alarm recording
	Alarm Types / Local Storage	Sound and light alarm, custom voice warning / Micro SD card, cloud storage
	Alarm Push	Select App push types, such as motion, human, vehicle, pet, package etc.
	One-Button Reset / Alarm	Supported
	Power / Power Consumption	DC12/1A / 12W MAX
	Ingress Protection / Installation	Non waterproof / Ceiling/Wall Mount
	Operating Temperature and Humidity	-30°C to 60°C, humidity less than 95% (non-condensing)

Outdoor Bullet WiFi Security Cameras

Meet Ansjer Outdoor WiFi Cameras - All Weather Protection. With IP66 weather resistance, Ansjer outdoor WiFi cams can shrug off dust, rain, and snow with no worries. Enhanced with high quality WiFi chip, this can effectively ensure unobstructed signal transmission, providing round-the-clock outdoors surveillance recording.



WiFi 6 Camera

C188

This 4MP WiFi 6 camera ombines high-definition clarity with seamless connectivity and advanced AI detection. Enjoy features like two-way audio, custom alerts, and smart night vision for comprehensive protection.



- WiFi 6 for fast, reliable connectivity.
- AI human and vehicle detection.
- 4MP high-definition resolution.
- Custom voice alerts.
- Two-way real-time communication.
- Smart night vision mode.




Camera	Camera Pixel	4MP
	Sensor Type	1/2.7" Progressive Scan CMOS
	Lens	4mm @ F2.0, 95° horizontal view angle
	Lens Interface Type	M12
	Minimum Illumination	0.012Lux (color mode); 0Lux (infrared light turned on)
	Infrared Light	4PCS
	White Light	2PCS
	Infrared Light Wavelength	850nm
	Day and Night Switching Mode	ICR infrared filter type
Video	Infrared Night Vision Distance	30 meters
	Maximum Image Size	2560 x 1440 (4MP), supports dual-stream
	Frame Rate	25fps
	Video Compression Standard	H.265 Main Profile
	Video Compression Rate	Up to 2048kbps
	Stream Type	Variable stream
	Dual-stream	Main Stream(2560 x 1440 Sub Stream: D1 (640×360)
Audio	Image Settings	Supports high definition/standard definition, and supports image mirror mode
	Audio Input	Built-in microphone
	Audio Output	Built-in speaker
Camera Features	Audio Compression Standard	G.711A
	White Balance	Auto
	Gain Control	Auto
	Digital Noise Reduction	3D digital noise reduction
	Backlight Compensation	Supports
Network	Wide Dynamic Range	Supports digital and hardware
	Strong Light Suppression	Supports
	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port
	Protocol Support	IPv4 DHCP ,ONVIF, TCP/IP ,NTP, RTSP,P2P
General	Software Support	Free app(Android/IOS) AVSS (PC/MacBook)
	Browser	Not supported
	Intelligent Detection	Supports motion detection, human detection, face detection, and vehicle detection
	Voice Function	Supports pickup
	Night Vision Type	Black and white night vision, full-color night vision
	Alarm Type	Sound and light alarm
	Power Supply	DC12V
	Working Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Memory Card Support	Only single machine supports, with a maximum support of 128G, the kit does not support
	Power Consumption	6W MAX
	Protection Level	IP66 (waterproof and dustproof)
	Appearance	Metal


Aurora Lux dual-band WiFi Security Camera


C186A


A vigilant home guard with top-of-the-line dual-band supports 2.4 GHz and 5 GHz WiFi Equipped with an extraordinary f/1.0 aperture lens and cutting-edge AI-ISP technology, it captures vivid color images even in the darkest environments. Experience night as if it were day with true all-day full-color and natural, detailed image restoration. Powered by a formidable 4.0 TOPS NPU, It accurately detects humans and vehicles, sending relevant information to your phone for precise alerts and instant feedback. Move from simply "seeing" to truly "seeing clearly" and even "understanding" with the C186A Aurora Lux WiFi Camera.



 Dual-band 2.4GHz and 5GHz WiFi support.

 Advanced AI for human, vehicle, and area detection.

 5MP/8MP ultra-high resolution for sharp, detailed images.

 Light and siren deterrence.

 24/7 True color images in extremely low light.


 IP66 weather-resistant design.



C186A



Camera	Camera Pixel	5MP/(8MP)
	Sensor	1/1.79" sensor/(1/2.8" sensor)
	Lens	5.0mm@F1.0/(4.0mm@F1.0)
	Viewing Angle	Horizontal 90°
	Lens Interface	M12
	Light Board/Night Vision Mode	3pcs White lights/Full-Color Night Vision
	Fill Light Control Mode	Three modes: automatic on (follow the light intensity automatically turn on/off the fill light), forced to turn on or forced to turn off the light, timed to turn on/off the fill light (you can set the start and end time)
	Brightness	Two modes: automatic adjustment, manual adjustment
	Lamp Power	1W
	Lamp Flux	140lm(lumen)
	Lamp Temperature	4500K
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Yes
AI Algorithm	Strong Light Suppression	Yes
	Privacy Masking	Supports customization of 5 zones
	Customized Alarm Voice	Yes
	Two-Way Audio	Yes
	Motion Detection	Yes
	Human Detection	Yes
	Vehicle Detection	Yes
	Area Invasion	Yes
	Area Departure	Yes
	Unmanned Detection	Yes
Port/Button	Traffic Detection	Yes
	Wandering Detection	Yes
	Cloud AI	Human/Vehicle/Pet/Package Detection(overseas version only)
	Wired Network Port	Yes
Compression Standard	Storage/Buttons	Micro SD Card (≤256G)/ Cloud Storage
	Audio Input/Audio Output	Built-in high sensitivity microphone
Image	Video Compression Standard	H.265
	Audio Compression Standard	G.711A
WiFi	Maximum Image Size	2880x1620(3840x2160)
	Frame Rate/Image Settings	25fps(15fps)
	WiFi Standard/Frequency Range	BLW 5.0 / IEEE 802.11b/g/n 1T1R
	Channel Bandwidth/Antenna	2.4 GHz/5GHz / 40MHz
Sensor	Networking Modes	AP config/ Bleconfig
	Protocol	TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, RTSP
	Material/Waterproof	Metal / IP66
	Working Temperature & Humidity	-10 C -60 C ,humidity <95%(no condensation)
	Power Supply	DC12V/1A
	Size	68x85x190 / 68x85x182
	Weight	490

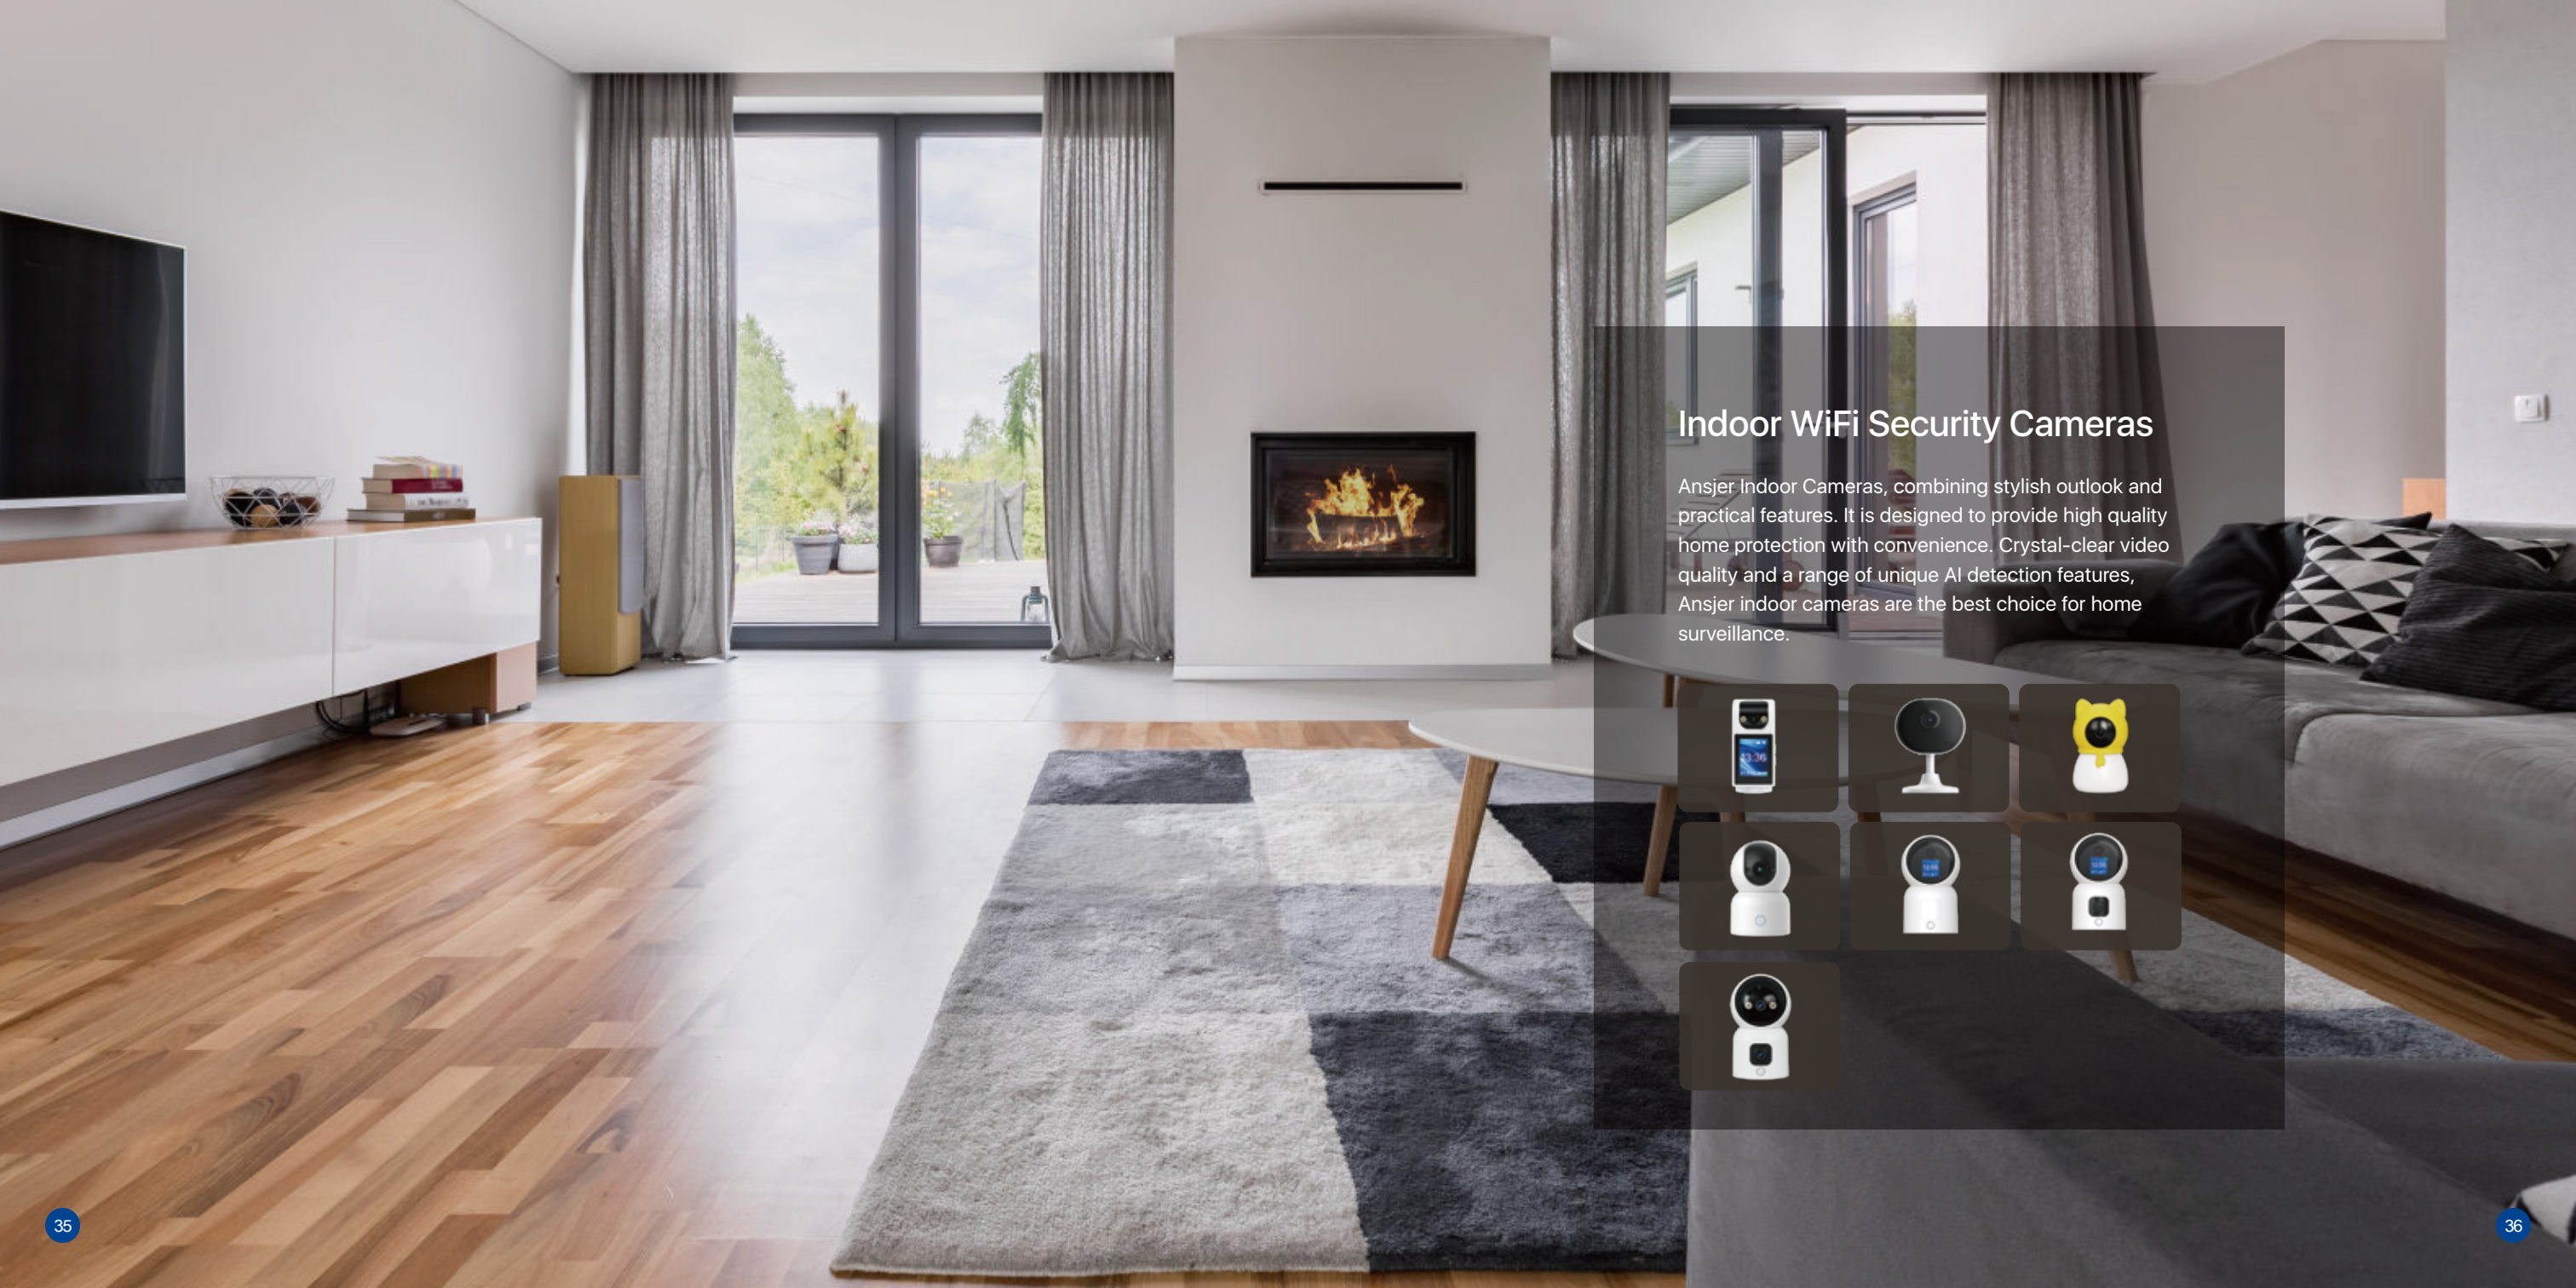

Indoor WiFi Security Cameras

Ansjer Indoor Cameras, combining stylish outlook and practical features. It is designed to provide high quality home protection with convenience. Crystal-clear video quality and a range of unique AI detection features, Ansjer indoor cameras are the best choice for home surveillance.




WiFi Camera with Monitor


C520M


The brand new 4MP/5MP indoor camera features a built-in monitor for easy two-way video calls and local weather display. With dual-band WiFi, advanced AI detection, and voice control, it ensures seamless communication and smart home security. Dual motors allow separate lens movement, and with a simple tap, you can activate privacy mode, pointing the lens downward for added peace of mind.





 Dual-band 2.4GHz and 5GHz WiFi support.

 Hands-Free voice control.

 Press-to-call with two-way video.

 Advanced AI for human, area and pet detection.

 Displays weather and temperature/humidity.

 Automatic human tracking.



C520M



Camera	Camera Pixel	4MP/5MP
	Image Sensor	1/2.7" Progressive Scan CMOS
	Lens	4mm @ F1.6
	Lens Interface Type	M12
	Illuminance Threshold	Soft light sensitivity: daytime to nighttime < 2Lux; nighttime to daytime > 4Lux
	Infrared Light / Infrared Light Wavelength	2 pcs IR Lights, 2 pcs White Lights / 850nm
Screen	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
	Screen Size	2.8"
	Resolution	240 * 320
	Screen Interface	SPI 4W
Common	Display Functions	WiFi signal, date, time, weather, temperature and humidity, two-way video call
	Video Compression Standard	20fps
Image	Video Compression Bitrate	H.265/H.265+ Main Profile
	Privacy Area Setting	Max. 2048kbps
	Dual Stream	Supported (up to 5 areas)
	Frame Rate	Main stream: (2880*1620) Sub stream: D1 (640*360)
Audio	Image Settings	Support HD/SD; support mirroring
	Audio Input	Built-in microphone
	Audio Output	Built-in speaker
Video	Audio Compression Standard	G.711A
	White Balance	Automatic
	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Digital/hardware
Network	Strong Light Suppression	Yes
	WiFi	2.4GHz/5GHz IEEE 802.11a/b/g/n
	Protocol	TCP/IP, HTTP, DHCP, DNS, MQTT, P2P, ONVIF, RTSP
	Software / Maximum Preview Users	ZOSI Smart (Android/iOS) AVSS (PC/MacBook) / 5
Common Features	Smart Detection	Motion/human/intrusion detection, etc.
	Video Call	Press-to-call/gesture to call family members anytime for two-way video calling (main account)
	Human Tracking	Automatic human tracking (returns to the original position after tracking is completed)
	Audio	Two-way audio (full duplex)
	Night Vision Type	Infrared night vision/support color night vision
	Recording Types	Continuous recording, alarm recording
	Alarm Push	Select App push types, such as motion, human, intrusion detection, etc.
	One-Button Reset	Supported
	Local Storage	Micro SD card (max. 256GB), NVR, cloud storage
	Horizontal Viewing Angle	0 ~ 355°
General	Vertical Viewing Angle	0 ~ 70°
	Power	DC5V/1.5A (Type-C Interface)
	Power Consumption	5W MAX
	Ingress Protection / Housing	Non waterproof / Plastic
	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Dimensions (mm) / Weight (g)	68*68*152 / 266g

Indoor WiFi Camera

C688

Tiny but mighty! This indoor camera offers flexible installation with its compact design and magnetic base, plus smart detection, two-way audio, and remote monitoring for versatile home security.



① Magnetic mount for easy installation.


👤 AI Human and motion detection.

2MP 2MP high-definition resolution.

💾 Flexible storage with micro SD card and cloud storage.

🗣️ Two-way audio for real-time communication.

📶 Remote monitoring from anywhere.

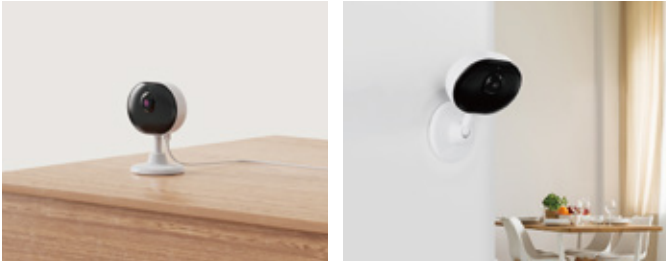

C688



Camera	Camera Pixel	2MP
	Sensor Type	1/4" HD CMOS Image Sensor
	Lens	4mm@F2.0
	Lens Interface Type	M12
	Minimum Illumination	Soft light sensitivity: daytime to nighttime < 2Lux; nighttime to daytime > 4Lux
	Infrared Light	2
	Infrared Light Wavelength	850nm
	Day and Night Switching Mode	ICR infrared filter type
	Infrared Distance	10 meters
	Viewing Angle	Horizontal 57°
Video	Digital Noise Reduction	3D Digital Noise Reduction
	Maximum Image Size	2MP, supports dual stream
	Frame Rate	20fps
	Video Compression Standard	H.265 Main Profile
	Stream Type	Variable Stream
	Dual Stream	Main stream: (1920 x 1080), Sub stream: D1(640×360)
	Image Settings	Supports HD/SD, supports image mirroring mode
Audio	Audio Input	Built-in microphone
	Audio Output	Built-in speaker
	Audio Compression Standard	G.711A
Algorithm	Motion Detection	Yes
	Human Detection	Yes
Network	WiFi Frequency Range	2.4 GHz
	Bluetooth Standard	BLW v4.2/5.0
	Wired Interface	None
	Protocol Support	TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, RTSP, (onvif is not supported currently)
	Software Support	Free app (Android/iOS), AVSS (PC/MacBook)
	Browser	Not supported
Features	Intelligent Detection	Motion detection, human shape detection
	Night Vision Type	Black and white night vision
	Recording Type	Continuous recording, alarm recording
General	Power Supply	DC5V/1A (Type-c port)
	Operating Temperature and Humidity	-10 C to 60 C , humidity less than 95% (non-condensing)
	Memory Card Support	Micro SD Card (≤256G)/ Cloud Storage
	Housing Material	Plastic

2.5K Baby Monitor

C516

This brand new baby monitor combines an adorable design with versatile functionality. Advanced AI detection capabilities proactively detect if any Covered Face/Crying/Departure events arise. Soothe your baby's emotions in time via two-way audio. Elevate the atmosphere with integrated music play and stay informed about your baby's comfort with temperature and humidity sensing.



4MP 4MP HD clarity for vibrant details

Secure data with micro SD card and cloud storage

Effortless two-way audio communication

AI Perimeter Detection , crying, and covered face detection

Wide 355° horizontal & 90° vertical view



C516









Camera	Camera Pixel	4MP
	Shutter	1/25 second to 1/100,000 second
	Pan/Tilt Angle	Horizontal: 0°-355°, Vertical: 0°-60°
	Wide Dynamic Range (WDR)	Digital Wide Dynamic Range
	Lens	3.6mm
	Field of View (FOV)	100°
	Day/Night Mode	ICR (Infrared-Cut Removable)
Video	Video Compression Standard	H.265
	Compression Bitratete	32Kbps~2Mbps
	Compression Output / Input Bitrate	Built-in Speaker and Microphone
Audio	Maximum Image Size	2560*1440
	Minimum Illumination	Color: 0.1Lux@F2.0 Black and White: 0.01Lux@F2.0
	Image Settings	Supports HD/SD switching, image mirroring
	Frame Rate	1~25 frames per second (fps)
Network	Smart Alarms	Motion detection, Crying detection, human-figure detection, human face detection.
	Wireless Network Security	64/128-bit WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
	Communication Protocol	TCP/IP,HTTP,DHCP,DNS
	Interface Protocol	Private
	Wireless Standard	2.4G WIFI(IEEE802.11b/g/n)
	Mobile Systems	iOS 11 and above, Android 5.0 and above
	Data Security	AES128
General	Operating Temperature & Humidity	-20 C to 50 C , humidity less than 90% (non-condensing)
	Power Supply	DC 5V1A Type-C USB
	Storage	Micro SD card (up to 128GB), Cloud storage
	Night Vision Distance	10 meters (varies depending on the environment)

2K AI Indoor Pan & Tilt WiFi Security Camera

C518

With AI detection, this smart home camera can identify person and vehicle instantly, enabling you to always focus on what you care about. In addition, this camera can enrich your world with more details in impressive 2K resolution.



-  2.4GHz & 5GHz, high-speed dual-band
-  Two-Way audio, easy intercom anytime, anywhere
-  2K super-clear pixels, providing high-quality images
-  355° Pan & 90° Tilt wide viewing angle
-  Powerful AI - Person/Vehicle detection
-  Press the button for real-time calls



C518



Camera	Camera Pixel	3MP
	Sensor Type	1/2.7" Progressive Scan CMOS
	Lens	4mm @ F2.0 Horizontal 95
	Lens Interface Type	M12
	Minimum Illumination	0.012Lux (color mode); 0Lux (infrared light on)
	Infrared Light	2
	Infrared Light Wavelength	850nm
	Day and Night Switching Mode	ICR infrared filter type
Video	Infrared Distance	10 meters
	Maximum Image Size	2304 x 1296 (3MP), supports dual stream
	Frame Rate	25fps
	Video Compression Standard	H.265 Main Profile
	Video Compression Rate	Up to 2048kbps
	Stream Type	Variable Stream
	Dual Stream	Main stream: (2304 x 1296), Sub stream: D1(640×360)
	Image Settings	Supports HD/SD, supports image mirroring mode
Audio	Audio Input	Built-in microphone
	Audio Output	Built-in speaker
	Audio Compression Standard	G.711A
Performance	White Balance	Automatic
	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Supports digital and hardware
Network	Strong Light Suppression	Supported
	Wired Interface	None
	Protocol Support	IPv4 DHCP ,ONVIF, TCP/IP ,NTP, RTSP,P2P
	Software Support	Free app (Android/iOS), AVSS (PC/MacBook)
General	Browser	Not supported
	Intelligent Detection	Motion detection, human shape detection, vehicle detection
	Voice Function	Supports sound pickup
	Night Vision Type	Black and white night vision
PTZ	Recording Type	Continuous recording, alarm recording
	Rotation Speed	13°/S
	Horizontal Viewing Angle	0~355°
General	Vertical Viewing Angle	0~90°
	Power Supply	DC 5V
	Operating Temperature and Humidity	-10 C to 60 C , humidity less than 95% (non-condensing)
	Memory Card Support	Supported
	Power Consumption	5W MAX
	Housing Material	Plastic

Indoor 2.5K Pan & Tilt Camera with Built-in Screen

C519M

Step into the future with our indoor pan-tilt camera. Enjoy 2.5K live streaming in 355°horizontal and 90°vertical views. Connect easily via dual-band WiFi. AI-driven features include human, crying, and audio anomaly detection. Your memories stay secure with both memory card and cloud storage. Elevate communication with one-touch video calls. This is more than a camera - it's your gateway to seamless, immersive living.



- Superior image quality with 4MP resolution
- 2.4GHz & 5GHz dual-band WiFi connectivity
- Built-in screen for two-way video calls
- AI-powered human, and audio anomaly detection
- One-click calling for instant connection
- 355° horizontal & 90° vertical field of view



C519M



Camera	Camera Pixel	4MP (2560*1440)
	Image Sensor	1/2.7" Progressive Scan CMOS
	Lens	4mm @ F2.0
	Lens Interface Type	M12
	Illuminance Threshold	Soft Light Sensitive: Day to Night Switching: <3Lux, Night to Day Switching: >9Lux
	Infrared Light / Infrared Light Wavelength	2pcs / 850nm
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
Pan-Tilt Cam	Screen Size	1.44 inches
	Resolution	128 * 128
	Screen Interface	SPI 4W
	Display Functions	Date/Time Display, Weather/Temperature and Humidity Display, Two-way Video Calling
Screen	Frame Rate	20fps
	Video Compression Standard	H.265/H.265+ Main Profile
	Video Compression Bitrate	Max. 2048kbps
	Privacy Area Setting	Supported (up to 5 areas)
	Dual Stream	Main stream: (2560*1440) Sub stream: D1 (640*360)
Video	Image Settings	Supports HD/SD switching, image mirroring
	Audio Input	Built-in microphone
	Audio Output	Built-in speaker
Audio	Audio Compression Standard	G.711A
	White Balance	Automatic
	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Digital/hardware
Performance	Strong Light Suppression	Not supported
	WiFi	2.4GHz/5GHz IEEE 802.11a/b/g/n
	Protocol	TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, ONVIF, RTSP
	Status Indicator	Button white light circle
	Software / Maximum Preview Users	ZOSI Smart (Android/iOS) AVSS (PC/MacBook) / 5
	Smart Detection	Motion/human/intrusion detection, etc.
	Video Call	Press-to-call/gesture to call family members anytime for two-way video calling (main account)
Common Features	Human Tracking	Automatic human tracking (returns to the original position after tracking is completed)
	Audio	Two-way audio (full duplex)
	Night Vision Type	Infrared night vision
	Recording Types	Continuous recording, alarm recording
	Recording Modes	Main stream/sub stream (optional, default is main stream)
	Alarm Push	Select App push types, such as motion, human, intrusion detection, etc.
	One-Button Reset	Supported
	Local Storage	Micro SD card (max. 128GB), NVR, cloud storage
	Horizontal Viewing Angle	0 ~ 360°
	Vertical Viewing Angle	0 ~ 108°
General	Power	DC 5V/2A (Type-C Interface)
	Power Consumption	5W MAX
	Ingress Protection / Housing	Non waterproof / Plastic
	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Dimensions (mm) / Weight (g)	152*90*90mm / 285g

Indoor Dual-Lens Camera with Built-in Screen

C528M

Revel in the brilliance of 2Kx2 clarity and a dual-lens design complete with an integrated screen. Engage in face-to-face video conversations and take advantage of advanced algorithms for human and gesture detection etc.. Keep track of objects with 355°pan and 90°tilt. Perfect for indoor spaces like living rooms, shops, and nurseries.



- 3MP

3MP high-definition clarity
- Screen

Built-in screen for two-way video calls
- Dual-Lens

Simultaneous dual-feed: one for panoramic view and one for detailed shots
- AI

Advanced algorithms for human/audio anomaly detection
- WiFi

view and one for detailed shots
- 355°

Dual-band 2.4GHz/5GHz WiFi connectivity
- 355°

355° pan & 90° tilt, human tracking for precise locking



C528M



Camera	Camera Pixel	3MP (2304*1296)
	Image Sensor	1/3.0" Progressive Scan CMOS
	Lens	4mm @ F2.0
	Lens Interface Type	M12
	Illuminance Threshold	Soft Light Sensitive: Day to Night Switching: <3Lux, Night to Day Switching: >9Lux
	Infrared Light / Warm Light	4pcs / None
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
Pan-Tilt Cam	Frame Rate	15fps, Network transmission frame rate adaptive
	Dual Stream	Main stream: 3MP (2304*1296) Sub stream: D1 (640*360)
	Resolution / Image Sensor	3MP (2304*1296) / 1/3.0" Progressive Scan CMOS
	Lens / Lens Interface Type	4.0mm/F2.0 / M12
	Minimum Illumination	Soft Light Sensitive: > 3Lux (Day Mode); < 3Lux (Infrared Light On)
	Infrared Lights / Warm Light	2pcs / None
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
Screen	Dual Stream	15fps, Network transmission frame rate adaptive
	Image Settings	Main stream: 3MP (2304*1296) Sub stream: D1 (640*360)
	Screen Size / Resolution	1.44 inches / 128 * 128
	Video Compression Standard	H.265
Video	Screen Interface	SPI 4W
	Display Functions	Date/Time Display, Weather/Temperature and Humidity Display, Two-way Video Calling
	Video Compression Standard/Bitrate	H.265/H.265+ Main Profile / 32Kbps~2Mbps
	Image Aspect Ratio	16:9
Audio	Privacy Area Setting / ROI	Supported (up to 5 areas) / Supported
	Image Settings / Watermark OSD	Supports HD/SD switching, image mirroring / Supported
Performance	Audio Input / Output	Built-in microphone / speaker
	Audio Compression Standard	Supports HD/SD switching, image mirroring / Supported
Network	White Balance / Gain Control	G.711A
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Supported
	Dynamic Range / Signal-to-Noise Ratio	81dB / 38dB
	Status Indicator	Button white light circle (Slow Flashing: No network, Fast Flashing: Calling/ Missed Call, Steady On: Already connected to the network)
	Signal-to-Noise Ratio / flash	Supported / GD 1G nand flash
	WiFi	2.4GHz/5GHz EEE 802.11a/b/g/n
	Protocol	TCP/IP、 HTTP、 DHCP、 DNS、 MQTT、 P2P、 ONVIF、 RTSP
	Cloud Storage	Cloud storage switchable between dual-lens recording
Common Features	Software / Maximum Preview Users	ZOSI Smart (Android/iOS) AVSS (PC/MacBook) / 5
	Smart Detection	Motion/human/intrusion detection, etc.
	Video Call	Press-to-call/gesture to call family members anytime for two-way video calling
	Human Tracking / Audio	Automatic human tracking / Two-way audio (full duplex)
	Night Vision Type / Alarm Push	Infrared night vision / Select App push types, such as motion detection
	Recording Types / Modes	Continuous recording, alarm recording / Main stream/sub stream
	One-Button Reset / Local Storage	Supported / Mirco SD card (max. 128GB), NVR cloud storage
General	Power / Power Consumption	DC 5V/2A (Type-C Interface) / 5W MAX
	Ingress Protection / Installation	Non waterproof / Lay Flat/Ceiling/Wall Mount
	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Dimensions (mm) / Weight (g)	152*90*90mm / 285g

Indoor Dual-Lens 2.4/5 GHz WiFi Camera

C528

Dual lens with 3MP HD capture intricate details for simultaneous dual visual experience. Enjoy one-touch calling and full-duplex intercom for effortless communication. Advanced detection along with human tracking abilities, effortlessly zeroing in on subjects of interest. Hassle-free installation makes it a perfect fit for indoor scenarios such as living rooms, shops, and baby rooms.



3MP 3MP+3MP HD image quality


Support for SD card and cloud storage for double data security

2.4GHz & 5GHz dual-band WiFi connectivity

355° pan & 90° tilt for ultra wide field of view

Dual-camera design: one for panoramic view and one for detailed capture

One-click calling and full-duplex intercom communication



C528



Camera	Camera Pixel	16:9 4MP
	Image Sensor	1/3.0" Progressive Scan CMOS
	Lens	4mm @ F2.0
	Lens Interface Type	M12
	Illuminance Threshold	Soft Light Sensitive: Day to Night Switching: <3Lux, Night to Day Switching: >9Lux
	Infrared Light / Warm Light	4pcs / None
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
	Frame Rate	15fps, Network transmission frame rate adaptive
Pan-Tilt Cam	Dual Stream	Main stream: 3MP (2304*1296) Sub stream: D1 (640*360)
	Resolution / Image Sensor	2MP (1920*1080) / 1/3.0" Progressive Scan CMOS
	Lens / Lens Interface Type	4.0mm/F2.0 / M12
	Minimum Illumination	0.01 Lux (Color Mode); 0 Lux (Infrared Light On)
	Infrared Lights / Warm Light	2pcs / None
	Day/Night Mode / Night Vision Distance	ICR (Infrared-Cut Removable) / 32ft (10M)
	Frame Rate	15fps, Network transmission frame rate adaptive
	Dual Stream	Main stream: 2MP (1920*1080) Sub stream: D1 (640*360)
Video	Video Compression Standard	H.265/H.265+ Main Profile
	Video Compression Bitrate	32Kbps~2Mbps
	Privacy Area Setting	Supported (up to 5 areas)
	Region of Interest (ROI)	Supported
	Image Settings	Supports HD/SD switching, image mirroring
Audio	Audio Input / Output	Built-in microphone / speaker
	Audio Compression Standard	G.711A
Performance	White Balance	Automatic
	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction
	Backlight Compensation	Supported
	Wide Dynamic Range	Supported
	Dynamic Range	81dB
	Signal-to-Noise Ratio	38dB
	Strong Light Suppression	Supported
Network	WiFi	2.4GHz/5GHz IEEE 802.11a/b/g/n
	Protocol	TCP/IP、HTTP、DHCP、DNS、MQTT、P2P、ONVIF、RTSP
	Status Indicator	Light circle on the press-to-call button, display network status, call/missed call and other status
	Software	ZOSI Smart (Android/iOS) AVSS (PC/MacBook)
	Maximum Preview Users	5
	Smart Detection	Motion/human/intrusion detection, etc.
Common Features	Video Call	Press-to-call/gesture to call family members anytime for two-way video calling
	Human Tracking	Automatic human tracking (returns to the original position after tracking is completed)
	Audio / Night Vision Type	Two-way audio (full duplex) / Infrared night vision
	Alarm Push	Select App push types, such as motion, human, intrusion detection, etc.
	Recording Types / Modes	Continuous recording, alarm recording / Main stream/sub stream
	One-Button Reset / Local Storage	Supported / Micro SD card (max. 128GB), NVR cloud storage
	Power / Power Consumption	DC 5V/1A (Type-C Interface) / 5W MAX
	Ingress Protection / Installation	Non waterproof / Lay Flat/Ceiling/Wall Mount
General	Operating Temperature and Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Dimensions (mm) / Weight (g)	152*90*90mm / 285g

Crystal-clear 4MP PoE Cameras

One Ethernet cable is all that you need per camera to transfer power and data. Compared to the traditional analog wired security systems, Ansjer PoE camera simplify the cabling issues while upgrading the security and privacy protection of data transmission.



C180

- Built-in clear microphone, one-way audio pick-up
- DC 12V power supply/PoE power supply
- Easy setup PoE system, 100% plug and play
- Ultra-long distance infrared night vision
- 4MP super- clear pixels, enjoying fineness and outstanding videos
- AI human & motion detection, catching the suspicious situation quickly
- IP66 waterproof, easily handle with all kinds of outdoor weather



C180+C PoE NVR

4MP HD Camera			
Camera	Camera Pixel	4MP	Sensor Type
	Lens	4 mm @ F2.0, horizontal 95°	Lens Interface Type
	Minimum Illumination	0.012 Lux (color mode); 0 Lux (infrared light on)	Infrared Light
	Infrared Light Wavelength	850nm	Day And Night Switching Mode
Video	Infrared Night Vision Distance	30m	ICR infrared filter type
	Maximum Image Size	2560×1440 (4MP), supports dual-stream	Frame Rate
	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate
	Stream Type	Variable bit rate	Dual Stream
Audio	Image Setting	Brightness, Contrast, Sharpness, Saturation (adjustable through NVR and APP)	
	Audio Input	Built-in microphone	Audio Output
	Audio Compression Standard	G.711A	None
	White Balance	Automatic	Gain Control
Camera Features	Digital Noise Reduction	3D Digital Noise Reduction	Backlight Compensation
	Wide Dynamic Range	Supported (digital/hardware)	Strong Light Suppression
	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Support Protocol
	Software Support	Free app (Android/iOS); AVSS (PC/MacBook)	Browser
Network	Smart Detection	Motion detection, human detection	Voice Function
	Night Vision Type	Black and white night vision	Recording Type
	Alarm Type	None	One-click Reset
	Power Supply	POE IEEE 802.3af, DC12V	Working Temperature And Humidity
Features	Memory Card Support	Not supported	Power Consumption
	Protection Level	IP66 (waterproof and dustproof)	Composition
			Metal

C220

- Built-in clear microphone, one-way audio pick-up
- DC 12V power supply/PoE power supply
- Easy setup PoE system, 100% plug and play
- Ultra-long distance infrared night vision
- 4MP super- clear pixels, enjoying fineness and outstanding videos
- AI human & motion detection, catching the suspicious situation quickly
- IP66 waterproof, easily handle with all kinds of outdoor weather



C220+C PoE NVR

4MP HD Camera				
Camera	Camera Pixel	4MP	Sensor Type	1/2.7" Progressive Scan CMOS
	Lens	4 mm @ F2.0, horizontal 95°	Lens Interface Type	M12
	Minimum Illumination	0.012 Lux (color mode); 0 Lux (infrared light on)	Infrared Light	2PCS
	Infrared Light Wavelength	850nm	Day And Night Switching Mode	ICR infrared filter
Video	Infrared Night Vision Distance	30 meters		
	Maximum Image Size	2560×1440 (4MP), supports dual-stream	Frame Rate	25fps
	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate	Up to 2048kbps
	Stream Type	Variable bit rate	Dual Stream	main stream (2560×1440); sub-stream: D1(640×360)
Audio	Image Setting	Brightness, Contrast, Sharpness, Saturation (adjustable through NVR and APP)		
	Audio Input	Built-in microphone	Audio Output	None
	Audio Compression Standard	G.711A		
Camera Features	White Balance	Automatic	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction	Backlight Compensation	Supported
	Wide Dynamic Range	Supported (digital/hardware)	Strong Light Suppression	Supported
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Support Protocol	IPv4 DHCP, ONVIF, TCP/IP, NTP, RTSP
	Software Support	Free app (Android/iOS); AVSS (PC/MacBook)	Browser	Not supported
Features	Smart Detection	Motion detection, human detection	Voice Function	Supports audio pickup
	Night Vision Type	Black and white night vision	Recording Type	Continuous recording, alarm recording
	Alarm Type	None	One-click Reset	Not supported
General	Power Supply	POE IEEE 802.3af, DC12V	Working Temperature and Humidity	-10 C to 60 C , humidity less than 95% (non-condensing)
	Memory Card Support	Not supported	Power Consumption	6W MAX
	Protection Level	IP66 (waterproof and dustproof)	Composition	Metal

8CH 5MP HD AI Human PoE NVR

- Supports up to 8CH PoE IPC adaptive access
- Allows for volume adjustment during image preview and playback
- Supports 10 or more languages
- Supports access, preview, storage, and playback of 5MP high-definition network video
- Can be used with front-end cameras for precise detection of human movement
- Allows for independent setting of human detection area and motion detection sensitivity
- Highly compatible with Ansjer products, supporting multiple independently developed intelligent network camera access



Series C PoE NVR

HD PoE NVR				
Audio and Video	Video Input	8 IP Cameras	Audio Input	Built-in microphone in the camera
	VGA Output	1920x1080, 1280x1024, 1024x768	HDMI Output	2560x1440, 1920x1080, 1280x1024, 1024x768
Recording	Video Compression Standard	H.265 Main Profile	Video Ecoding Resolution	5MP/1080P
	Video Bit Rate	Up to 5Mbps	Stream Type	Variable bit rate
	Dual Stream	Supports dual stream network transmission (PC, MacBook, APP)	Audio Compression Standard	G.711a
	Synchronous Playback	4 channels	Image Settings	Supports brightness, saturation, mirroring, image flipping (not actually available), color settings, etc. for front-end cameras
HDD	Type	1 SATA interface	Maximum Capacity	Supports up to 8TB capacity
	Recording Mode	Manual recording, timed recording, motion detection recording	Backup Mode	Normal backup, event backup
Network	Playback Mode	Instant playback, normal playback, event playback, alarm playback		
	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol	IPv4, TCP/IP, P2P, RTSP, NTP (network time synchronization), SMTP (mail service)
	Client	Supports Windows and MacBook systems	Mobile	Supports Android and iOS systems
	Permissions	Supports different levels of device operation permissions (channel access, recording playback, remote viewing of specific channel permissions)		
Intelligent Alarm	Motion Detection	Supports, can independently set the motion detection range	Human Detection	Supports, can independently set the human detection range
	Sound and Light Alarm	Not supported	Alarm Push	App notification on motion detection
	Email Alarm	Supports (supports sending screenshots via email, with the main stream image as an attachment)		
Interface	Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet port	USB Interface	2x USB 2.0
	Audio Output	1 3.5mm audio interface	POE Network Port	8, supports 802.3af/at
General	Power	DC48V/2A	Power Consumption (excluding hard drive)	≤96W
	Operating Temperature	-10 C to 55 C	Operating Humidity	10%~90%RH
	Size	230mm x 230mm x 42mm	Weight (excluding hard drive)	≤0.85kg (bare machine)

Aurora Lux 3K True Night Color PoE Camera

Unveil day-like visuals in the dark. With an advanced 1/1.79" CMOS sensor and a remarkable F1.0 aperture, it redefines low-light capture without the need for supplementary lighting, transforming darkness into vivid clarity.



C186

- 5MP super sensor with F1.0 large aperture
- Exceptional low-light capture for daytime-like effects in darkness
- AI ISP image processing technology
- 24/7 true-color vision for round-the-clock clarity.
- Two-way communication for interactive engagement
- AI-powered Human, Vehicle Detection
- Smart light and siren alarm for proactive defense
- Easy setup PoE system, 100% plug and play
- Can work with our NVR as a system kit



5MP HD Camera			
Camera	Camera Pixel	5MP	Flash
	Storage	256MB	Image Sensor
	Resolution	5MP	Lens Focal Length
	Lens Aperture	F1.0	Night Vision Illumination
	Light Control Mode	3 modes: ① Automatic light on (automatically turns on/off the supplementary light based on light intensity) ② Forced light on or off ③ Scheduled supplementary light control (can set start and end times)	
Video	Light Brightness	2 modes: automatic adjustment, manual adjustment	Warm Lights
	Night Vision Distance	100ft (30m)	Maximum Image Size
	Max Frame Rate	25fps	Video Encoding Channels
	Main Stream	2880*1620 (5M), 2560*1440 (4M), 2304*1296 (3M), 1920*1080 (1080P), 1280*720 (720P)	
	Video Coding Format	H.265, H.264	Video Coding Standards
Audio	Video Coding Standards	H.265	Video Encoding Bit Rate
	Image Settings	Brightness, contrast, saturation, sharpness etc.	Microphone
	Speaker	Built in speaker	Two-Way Audio
	Audio Coding Format	G.711A, G.711U	
	Wired Interface	Network interface: 1 10/100Mbps Ethernet port (RJ45), PoE function optional	Intelligent Detection
Features	Sound and Light Alarm	Supported	Image Mirroring
	Noise reduction	3D Digital Noise Reduction	Interface Protocol
	Protocol	TCP/IP, DHCP, HTTP, HTTPS NTP, DNS, RTP RTSP	Remote Access
	IP function	DHCP, adaptive IP, static IP	Mirco SD Card/Power Supply
	Indicator Light	Red and green indicator lights. Steady red light: camera activated.Green light flashes slowly: waiting for connection. Red light flashes slowly: camera offline.Steady green light: camera online	
General	Reset Button	Supported	Operating Temperature
	Power Consumption/ Operating Humidity	12W MAX / Humidity less than 95% (non-condensing)	Installation
			Wall/ceiling/strap mount

Advance Detection
Pan & Tilt 5MP PoE Cameras

* standalone ver. camera with SD card slot.

Ansjer Pan & Tilt PoE camera provides wider and clearer visuals for your home surveillance. It can capture every details from all directions and delivers stunning video quality in multi-channel live viewing, 100% plug and play for 24/7 peace of mind video & audio recording.



C296

- 355° Pan & 140° Tilt wide viewing angle
- Smart auto-cruise, always report the unusual situation
- Starlight night vision/Smart night vision
- Two-Way audio, easy intercom anytime, anywhere
- AI-powered Human, Vehicle, Face, & Voice Activity Detection
- Light & Siren alarm, proactive defense
- Easy setup PoE system, 100% plug and play
- 5MP super- clear pixels, enjoying fineness and outstanding videos
- Intelligent auto- tracking, accurate locking of suspicious people



C296+Q PoE NVR



C296+K PoE NVR

5MP HD Camera			
Camera	Camera Pixel	5MP	Sensor Type
	Shutter	Adaptive shutter	Lens
	Minimum Illumination	0Lux (infrared light on)	Lens Interface Type
	Day And Night Conversion Mode	ICR infrared filter type	Warm Light
	Infrared Distance	6PCS, effective night vision distance of 30 meters	
Compression Standard	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate
	Audio Compression Standard	G.711A	Two levels of HD and SD, adaptive bit rate
	Maximum Image Size	2880 x 1620, supports dual-stream	Frame Rate
Image	Image Settings	Supports HD/SD; supports picture mirror mode	
	Rotation Speed	13°/S	Horizontal Viewing Angle
	Vertical Viewing Angle	0~140°	0~355°
PTZ	Intelligent Alarm	Intelligent motion detection, human detection alarm	Intelligent Detection
	AI Algorithm	Human detection, car detection, abnormal sound detection (not supported in kit), face detection	Supports AI car detection, human tracking
	Microphone	Supports	Speaker
Performance	Cruise	Supports	Point-to-point Cruise
	Digital Noise Reduction	3D digital noise reduction	Supports
	Backlight Compensation	Supports	Wide Dynamic Range
	Protocol Support	IPv4 DHCP ,ONVIF,HTTP, TCP/IP, NTP, RTSP	Strong Light Suppression
General	Power Consumption	8W MAX	Network Status Prompt
	Power Supply	POE IEEE 802.3af, DC12V	Operating Temperature And Humidity
	Reset Button	Supports	1 (network connection status prompt)
	Protection Level	IP66 (waterproof and dustproof)	Size (mm)
			179mm x 111.8mm x 161.8mm
			Weight
			≤0.514kg (bare machine)

Upgraded AI-Powered
5MP/4K PoE Cameras

* standalone ver. camera with SD card slot.

Innovative and Professional 4K PoE security camera system, incorporates upgraded AI Algorithm to detect human and vehicle precisely, effectively reduce the false alarm. The 4K camera is equipped with starlight sensor to capture more lights and make your night vision brighter and clearer. As Ansjer’s most durable and feature-rich, this system will be ideal for 24/7 home & business protection.



C182

- 4K Flawless 4K Ultra HD images/5MP super-clear images
- Starlight night vision/Smart night vision
- AI-powered Human, Vehicle, Face, & Voice Activity Detection
- Light & Siren alarm, proactive defense
- Two-Way audio, easy intercom anytime, anywhere
- PoE power supply/DC 12V power supply
- Easy setup PoE system, 100% plug and play
- IP66 waterproof, easily handle with all kinds of outdoor weather



C182+Q PoE NVR



C182+K PoE NVR

8MP HD Camera			
Camera	Camera Pixel	8MP	Image Sensor
	Lens	4mm @ F1.6, 110° horizontal viewing angle	Lens Interface Type
	Minimum Illumination	0.012Lux (Color mode); 0Lux (Infrared light on)	Infrared Light/White Light
	Infrared light wavelength	850nm	Day/Night Mode
	Infrared Night Vision Distance	30m	ICR infrared filter type
Recording	Maximum Image Size	3840 x 2160 (8MP), supports dual-stream	Frame Rate
	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate
	Stream Type	Variable bit rate	Dual Stream
	Image Setting	Brightness; Contrast; Sharpness; Saturation (adjustable through NVR, APP settings)	
Audio	Audio Input	Built-in microphone	Audio Output
	Audio Compression Standard	G.711A	Built-in speaker
Camera Features	White Balance	Automatic	Gain Control
	Digital Noise Reduction	3D Digital Noise Reduction	Backlight Compensation
	Wide Dynamic Range	Support digital/hardware	Strong Light Suppression
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Support Protocol
	Software Support	Free app(Android/iOS); AVSS (PC/MacBook)	Browser
Smart Alarm	Intelligent Detection	Motion Detection, Human/Form/Face/Vehicle Detection	Voice Function
	Night Vision Type	Black and white night vision, full-color night vision, intelligent night vision	Recording Type
	Alarm Type	Light alarm, sound alarm, sound and light alarm, multiple alarm modes	One-click Reset
General	Power Supply	POE IEEE 802.3af, DC12V	Operating Temperature And Humidity
	Power Consumption	6W MAX	Composition
	Protection Level	IP66 (waterproof and dustproof)	Weight
	Size (mm)	225mm x 102mm x 63mm	

C225

- Flawless 4K Ultra HD images/5MP super-clear images
- Starlight night vision/Smart night vision
- AI-powered Human, Vehicle, Face, & Voice Activity Detection
- Light & Siren alarm, proactive defense
- Two-Way audio, easy intercom anytime, anywhere
- PoE power supply/DC 12V power supply
- Easy setup PoE system, 100% plug and play
- IP66 waterproof, easily handle with all kinds of outdoor weather



C225+Q PoE NVR




C225+K PoE NVR

8MP HD Camera				
Camera	Camera Pixel	8MP	Image Sensor	1/2.8" Progressive Scan CMOS
	Lens	4mm @ F1.6, 110° horizontal viewing angle	Lens Interface Type	M12
	Minimum Illumination	0.012Lux (Color mode); 0Lux (Infrared light on)	Infrared light/White light	4/2PCS
	Infrared light wavelength	850nm	Day/Night Mode	ICR infrared filter type
	Infrared Night Vision Distance	30m		
Recording	Maximum Image Size	3840 x 2160 (8MP), supports dual-stream	Frame Rate	Main stream: (20fps) Sub stream: (20fps)
	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate	Main stream: 5120kbps Sub stream: 512Kbps
	Stream Type	Variable bit rate	Dual Stream	Main stream: (3840×2160) Sub stream: D1(640×360)
	Image Setting	Brightness; Contrast; Sharpness; Saturation (adjustable through NVR, APP settings)		
Audio	Audio Input	Built-in microphone	Audio Output	Built-in speaker
	Audio Compression Standard	G.711A		
Camera Features	White Balance	Automatic	Gain Control	Automatic
	Digital Noise Reduction	3D Digital Noise Reduction	Backlight Compensation	Support
	Wide Dynamic Range	Support digital/hardware	Strong Light Suppression	Support
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Support Protocol	IPv4; TCP; UDP; RTSP; RTP; DHCP; NTP; ONVIF
	Software Support	Free app (Android/iOS); AVSS (PC/MacBook)	Browser	Not supported
Smart Alarm	Intelligent Detection	Motion Detection, Human-Form/Face/Vehicle Detection	Voice Function	Support two-way voice (half-duplex)
	Night Vision Type	Black and white night vision, full-color night vision, intelligent night vision	Recording Type	Continuous recording, alarm recording
	Alarm Type	Light alarm, sound alarm, sound and light alarm, multiple alarm modes	One-click Reset	Not supported
	Installation With Adjustable Angle	Horizontal: 0-360°, Vertical: 0-75°		
General	Power Supply	POE IEEE 802.3af, DC12V	Operating Temperature and Humidity	-10℃ to 60℃, humidity less than 95% (non-condensing)
	Protection Level	IP66 (waterproof and dustproof)	Power Consumption	6W MAX
	Composition	Metal+Plastic	Weight	≤0.51kg (bare machine)
	Size (mm)	225mm x 102mm x 63mm		

8CH 4K UHD AI Human AI Vehicle PoE NVR

- Supports searching and playback of video files
- Supports 10 or more languages
- Uses a new QT interface with user-friendly design
- Supports access, preview, storage and playback of 8MP high-definition network videos
- Can be used with front-end cameras to support human/-face/vehicle detection, sound and light alarms, proactive defense, and property security
- Can independently set the human detection area and motion detection sensitivity
- Supports HDMI and VGA dual output, with HDMI output supporting 4K resolution



Series Q PoE NVR

HD PoE NVR				
Audio	Video Input	8 channels of IP Camera	Audio Input	Camera' built-in mic
	1 VGA Output	1920×1080, 1280×1024, 1024×768	1 HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
Recording	Video Compression Standard	H.265 Main Profile	Video Decoding Resolution	8MP/5MP/1080P
	Video Bit Rate	Up to 8Mbps	Stream Type	Variable bitrate
	Dual Stream	Supports dual stream network transmission (PC, MacBook, APP)	Audio Compression Standard	G.711a
	Synchronous Playback	4 channels	Image Settings	Support brightness, saturation, mirror, color and other settings for front-end cameras
	Recording Mode	Manual recording, scheduled recording, intelligent detection recording	Playback Mode	Instant playback, regular playback, event playback, alarm playback
HDD	Backup Mode	Regular backup, event backup		
	Type	1 SATA interface	Maximum Capacity	Supports up to 8TB capacity
	Network Protocol	IPv4, UPNP (plug and play), DHCP, P2P, RTSP, NTP (network time correction), SMTP (mail service)	Client	Supports Windows system, MacBook
	Mobile	Supports Android, iOS system	Permission	Supports device access permissions at different levels (channel access recording playback, remote viewing specific channel permissions)
Smart Alarm	Email Alarm	Supports email sending of screenshots, with sub-stream images as attachments	Motion Detection	Supports independent setting of motion detection range, sensitivity adjustable from 1 to 8 (default is 6)
	Human Detection	Supports independent setting of human detection range	Sound And Light Alarm	Supports multiple alarm modes
	Alarm Push Notifications	Supports mobile detection app alarm push notifications		
Interface	Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet port	USB Interface	2x USB 2.0
	Audio Output	3.5MM audio interface	POE Network Port	16 RJ45 ports, supports 802.3af/at
General	Power Supply	DC48V/2A	Power Consumption (Excluding Hard Disk)	≤96W
	Operating Temperature	-10℃ to +55℃	Operating Humidity	10% to 90%RH
	Dimensions	300mm×228mm×45mm	Weight (Excluding Hard Disk)	≤1.2Kg (bare machine)

16 CH 4K UHD AI Human AI Vehicle PoE NVR

- Supports up to 16CH PoE IPC adaptive access
- Supports access, preview, storage and playback of 8MP high-definition network videos
- Can be used with front-end cameras to support human/face/-vehicle detection, sound and light alarms, proactive defense, and property security
- Can independently set the human detection area and motion detection sensitivity
- Supports HDMI and VGA dual output, with HDMI output supporting 4K resolution
- Supports search and playback of video files
- Supports 1 HDD SATA interface, maximum supports Seagate, Western Digital, Toshiba and other 8TB hard disks



Series K PoE NVR

HD PoE NVR				
Audio	Video Input	16 channels of IP Camera	Audio Input	Camera' built-in mic
	1 VGA Output	1920×1080, 1280×1024, 1024×768	1 HDMI Output	3840×2160, 1920×1080, 1280×1024, 1024×768
Recording	Video Compression Standard	H.265 Main Profile	Video Decoding Resolution	8MP/5MP/1080P
	Video Bit Rate	Up to 8Mbps	Stream Type	Variable bitrate
	Dual Stream	Supports dual stream network transmission (PC, MacBook, APP)	Audio Compression Standard	G.711a
	Synchronous Playback	4 channels	Image Settings	Support brightness, saturation, mirror, color and other settings for front-end cameras
	Recording Mode	Manual recording, scheduled recording, intelligent detection recording	Playback Mode	Instant playback, regular playback, event playback, alarm playback
	Backup Mode	Regular backup, event backup		
HDD	Type	1 SATA interface	Maximum Capacity	Supports up to 8TB capacity
	Network Protocol	IPv4, UPNP (plug and play), DHCP, P2P, RTSP, NTP (network time correction), SMTP (mail service)	Client	Supports Windows system, MacBook
	Mobile	Supports Android, iOS system	Permission	Supports device access permissions at different levels (channel access recording playback, remote viewing specific channel permissions)
Smart Alarm	Email Alarm	Supports email sending of screenshots, with sub-stream images as attachments	Motion Detection	Supports independent setting of motion detection range, sensitivity adjustable from 1 to 8 (default is 6)
	Human Detection	Supports independent setting of human detection range	Sound And Light Alarm	Supports multiple alarm modes
	Alarm Push Notifications	Supports mobile detection app alarm push notifications		
Interface	Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet port	USB Interface	2x USB 2.0
	Audio Output	3.5MM audio interface	POE Network Port	16 RJ45 ports, supports 802.3af/at
General	Power Supply	DC52V/3A	Power Consumption (Excluding Hard Disk)	≤96W
	Operating Temperature	-10 C to 55 C	Operating Humidity	10% to 90%RH
	Dimensions	300mm× 228mm ×45mm	Weight (Excluding Hard Disk)	≤1.2Kg (bare machine)

03 Wireless Security Camera System

2.4GHz WiFi Security Camera System

Afraid of messy cabling? Ansjer WiFi security camera system is simple to install with no cabling needed. Simply plug in the adapter and power on the system, you can view live in just a few seconds. Ansjer WiFi security system is perfect for home and business protection.



C302

- 3MP 3MP HD pixels for clearer image quality
- Wireless connection, transmitting stable WiFi signal
- True plug & play, auto-pairing in seconds
- Remote access and control, 24/7 surveillance recording
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- AI human & motion detection



C302+P WiFi NVR



C302+All in One NVR

3MP HD Camera				
Camera	Camera Pixel	3MP	Sensor Type	1/2.9" Progressive Scan CMOS
	Shutter	Adaptive shutter	Lens	3.6mm @ F2.0 90°
	Lens Interface Type	M12	Minimum Illumination	3Lux (color mode); 0.2Lux (black and white mode); 0Lux (infrared light on)
	White Light	2PCS (10 meters in night vision mode, can be turned on to achieve full-color night vision mode)	Day and Night Conversion Mode	ICR infrared filter type
	Infrared Irradiation Distance	4PCS (20 meters low-light compensation effective night vision distance)		
Compression Standard	Video Compression Standard	H.265 Main Profile	Video Compression Bit rate	High definition and standard definition, adaptive bit rate
	Audio Compression Standard	G.711A		
Image	Maximum Image Size	1920x1080, supports dual-stream	Frame Rate	15fps, adaptive network transmission rate
	Image Settings	Brightness, contrast, sharpness, saturation (adjustable through NVR)	Privacy Masking	4 blocks (adjustable through NVR)
	Audio Input	Built-in microphone	Audio Output	Built-in speaker
	Audio Compression Standard	G.711A		
Performance	Intelligent Alarm	Intelligent motion detection, human detection, sound and light alarm	Audio Input	1 microphone
	Speaker	1	Wide Dynamic Range	None
	Digital Noise Reduction	3D digital noise reduction	Strong Light Suppression	Supported
	Backlight Compensation	Supported	Browser	None
	Protocol Support	Private protocol		
Interface	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Power Supply Interface	DC12V
	Reset Button	Supports NVR reset IPC, Avss reset IPC	Network indicator	1 (network connection status indication)
Wireless	Wireless Standard	IEEE802.11b/g/n	Frequency Range	2.4 GHz ~ 2.4835 GHz
	Channel Bandwidth	20MHz	Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps
	Network Protocol	HTTP, DHCP, DDNS, IPv4, NTP,RTSP		
General	Operating Temperature and Humidity	-10 C° to 60 C°, humidity less than 95% (non-condensing)	Power Supply	DC 12V±10%
	Power Consumption	6W MAX	Protection Level	IP66 (waterproof and dustproof)
	Dimensions (mm)	72mm x 72mm x 150mm	Weight	≤0.385kg (bare machine)

C289

- 3MP 3MP HD pixels for clearer image quality
- Wireless connection, transmitting stable WiFi signal
- 355° Pan & 140° Tilt wide viewing angle
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- Smart auto-cruise, always insight into the abnormal
- True plug & play, auto-pairing in seconds
- Remote access and control, 24/7 surveillance recording
- AI human & motion detection



C289+P WiFi NVR



C289+All in One NVR

3MP HD Camera				
Camera	Camera Pixel	3MP	Sensor Type	1/2.9" Progressive Scan CMOS
	Shutter	Adaptive shutter	Lens / Lens Interface Type	4.0mm @ F2.0 / M12
	Minimum Illumination	0Lux (infrared light on)	Day And Night Switching Mode	ICR infrared filter type
	Warm Light	4PCS	Infrared Distance	4PCS, 30 meters effective night vision
	Video Compression Standard	H.265 Main Profile	Video Compression Bit Rate	Two levels of HD and SD, adaptive bit rate
Compression Standard	Audio Compression Standard	G.711A		
	Maximum Image Size	2304x1296, supports dual stream	Frame Rate	15fps, adaptive frame rate
Image	Image Settings	Supports HD/SD; Supports image mirroring mode		
PTZ	Rotation Speed	13°/S	Horizontal Viewing Angle	0-355°
	Vertical Viewing Angle	0-140°		
Performance	Intelligent Alarm	Intelligent motion detection alarm, humanoid detection, sound and light alarm	Speaker	Supports
	Microphone	Supports	Point-to-Point Cruise	Supports
	Cruise	Supports	Wide Dynamic Range	Supports
	Digital Noise Reduction	3D digital noise reduction	Strong Light Suppression	Supports
	Backlight Compensation	Supports	Network Status Prompt	1 (network connection status indication)
	Protocol Support	HTTP, DHCP, DDNS, IPv4, NTP,RTSP		
Wireless	Antenna	23dB antennas	Wireless Standard	IEEE802.11b, 802.11g, 802.11n
	Frequency Range	2.4 GHz ~ 2.4835 GHz	Channel Bandwidth	Supports 20MHz
	Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps		
General	Power Supply	DC12V±10%	Working Temperature And Humidity	-10°C to 60°C, humidity less than 95% (non-condensing)
	Reset Button	Supports	Power Consumption	8W MAX
	Protection Level	IP65 (waterproof and dustproof)	Dimensions (mm)	205.0mm x 200mm x 118.0mm
	Weight	≤0.780kg (bare machine)		

8CH Outdoor 2K HD AI Human WiFi NVR

- Maximum support for 8CH wifi IPC adaptive access
- Maximum support for 8 channels of 3.0MP 15fps decoding
- Supports 10 or more languages
- Supports remote management of IPC functions and remote upgrading of front-end IPC
- Supports HDMI and VGA simultaneous output with an output resolution of 1080P
- Compliant with the IEE802.11A/G/N/B standard specifications, it supports up to 8 cameras with the WIFI 2.4G standard simultaneously connected, with 4 channels decoded simultaneously



Series P WiFi NVR

HD WiFi NVR			
Output	CVBS Output	None	VGA Output
	HDMI Output	1920×1080/1280×1024/1024×768	
Audio and Video	Video Compression Standard	IP channel supports 3.0MP H.265	Video Coding Resolution
	Video Bit Rate	32Kbps ~ 1Mbps	Stream Type
	Dual Stream	Supports dual stream network transmission (PC, MacBook, and APP)	Audio Compression Standard
	Synchronous Playback	4 channels	Image Settings
WiFi	Antenna	Dual antenna	Wireless Standard
	Frequency Range	2.4 GHz ~ 2.4835 GHz	Channel Bandwidth
	Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps	Device Addition
	Transmission Range	300 meters straight line distance for one camera (non-cascaded) in open areas, 150 meters straight line distance for multi-cameras (non-cascaded) in open areas, 50 meters distance for multi-cameras (non-cascaded) through walls. The actual transmission distance depends on the complexity of the environment.	
HDD	Type	1 SATA interface	Maximum Capacity
Recording	Recording Modes	Manual recording, scheduled recording, motion detection recording, human detection recording	Backup Modes
	Playback	instant playback, normal playback, event playback, alarm playback	
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol
	Client	AVSS supports Windows systems (Windows XP, Windows 7, Windows 8, Windows 10), MacBook	Mobile
	Permissions	Supports different levels of device access permissions (channel access, video playback, remote viewing of specific channel permissions)	
Smart Alarm	Email Alert	Supports (supports email sending of screenshots, attachments are main stream images)	Human Detection
	Motion Detection	Supported	Alarm Push
General	Network Interface	1 RJ45 10M/100M adaptive Ethernet port	USB Interface
	Alarm Input	0	Alarm Output
	Power Supply	DC12V/2A	Power Consumption
	Operating Temperature	-10°C to +55°C	Operating Humidity
	Dimensions	258mm× 211mm ×45mm	Weight (Including 1T Hard Disk)

All in One NVR

- Maximum support for 8CH wifi IPC adaptive access
- Maximum support for 8 channels of 3.0MP 15fps decoding
- Allows searching and playback of recorded files
- Supports HDMI simultaneous output with an output resolution of 1080P
- Uses H.265+ and AVBR algorithm technology to improve data transmission and storage by more than 20% compared to traditional methods.
- Supports access, preview, storage, and playback of 3 MP high-definition video.



All in One NVR			
Output	CVBS Output	None	HDMI Output
			1920×1080/1280×1024/1024×768
Audio and Video	Video Compression Standard	IP channel supports 3.0MP H.265+	Video Coding Resolution
	Video Bit Rate	32Kbps ~ 1Mbps	Stream Type
	Dual Stream	Supports dual stream network transmission (PC, MacBook, and APP)	Audio Compression Standard
	Synchronous Playback	4 channels	Image Settings
WiFi	Antenna	Dual antenna	Wireless Standard
	Frequency Range	2.4 GHz ~ 2.4835 GHz	Channel Bandwidth
	Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps	Device Addition
	Transmission Range	300 meters straight line distance for one camera (non-cascaded) in open areas, 150 meters straight line distance for multi-cameras (non-cascaded) in open areas, 50 meters distance for multi-cameras (non-cascaded) through walls. The actual transmission distance depends on the complexity of the environment.	
HDD	Type	1 SATA interface	Maximum Capacity
Recording	Recording Modes	Manual recording, scheduled recording, motion detection recording, human detection recording	Backup Modes
	Playback	instant playback, normal playback, event playback, alarm playback	
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol
	Client	AVSS supports Windows systems (Windows XP, Windows 7, Windows 8, Windows 10), MacBook	Mobile
	Permissions	Supports different levels of device access permissions (channel access, video playback, remote viewing of specific channel permissions)	
Smart Alarm	Email Alert	Supports (supports email sending of screenshots, attachments are main stream images)	Human Detection
	Motion Detection	Supported	Alarm Push
General	Network Interface	1 RJ45 10M/100M adaptive Ethernet port	USB Interface
	Alarm Input	0	Alarm Output
	Power Supply	DC12V/2A	Power Consumption
	Operating Temperature	-10°C to 55°C	Operating Humidity
	Dimensions	300mm× 230mm ×52mm	Weight (Including 1T Hard Disk)

Battery WiFi Security Camera System

Battery-powered WiFi security camera systems, a true wire free system with no wires required for the cameras. With a stable WiFi connection, this system can deliver great performance. Featuring accuracy detection and proactive defense function, so you can install the cameras anywhere around your household to protect every corner that matters to you.



C306 PK

- 3MP 3MP HD pixels for clearer image quality
- Wireless connection, transmitting stable WiFi signal
- Two-Way Audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- Smart night vision, seeing full color images in day & night
- Supports up to 8TB HDD High-capacity local storage
- PIR Motion detection & Person detection, capturing suspicious precisely
- Supports charging with external green & energy-saving solar panel
- Removable high-capacity battery, more convenient to replace



C306+P WiFi NVR

3MP HD Camera			
Camera	Sensor Type	1/2.9" CMOS	Sensor Pixel
	Lens	3.6mm @ F2.0 90°	Angle Adjustment
	Minimum Illumination	0Lux (infrared light on)	Shutter
	Day and Night Conversion Mode	ICR infrared filter	Wide Dynamic Range
	Infrared Light	6PCS	Effective Night Vision Distance
	Warm Light	1PCS	
Video	Video Compression Standard	H.265 Main Profile	Compression Output Bit Rate
	Maximum Image Size	2304 X 1296	Frame Rate
	Image Setting	Support high-definition/standard-definition; support image flip	Audio
Protocol	Interface Protocol	Private	Communication Protocol
	Common Functions	Dual-stream, password protection	Wifi
Battery	Battery Trigger	PIR (around 10 meters)	Remote Wake-up
	Time to Output Image	Within 2s	Working Time
	Standby Current	200uA	Working Current
	Battery Capacity	7800mAh (rechargeable)	Power Supply
General	One-click Reset	Support	Working Temperature and Humidity
	Protection Level	IP66	Dimensions (mm)
	Weight (kg)	≤0.930kg (bare machine)	

C1 Pro JK

- 3MP 3MP HD pixels for clearer image quality
- Wireless connection, transmitting stable WiFi signal
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- Supports up to 1TB Micro SD card storage
- PIR Motion detection & Person detection, capturing suspicious precisely
- Smart night vision, seeing full color images in day & night
- Built-in rechargeable battery, suitable for indoors and outdoors use
- Supports charging with external green & energy-saving solar panel



C1 Pro+J WiFi NVR

3MP HD Camera				
Camera	Sensor Type	1/2.9" CMOS	Sensor Pixels	3MP
	Minimum Illumination	0 Lux (infrared light on)	Lens	3.6mm @ F2.0 90°
	Wide Dynamic Range	Digital wide dynamic range	Day and Night Conversion Mode	ICR infrared filter type
	Night Vision Mode	Black and white night vision (default), support color night vision	Infrared Light	9PCS
	Infrared Distance	15 meters	Warm Light	2PCS
	Image Settings	Supports high-definition/standard-definition; supports picture flip		
	Video Compression Standard	H.265 Main Profile	Compression Output Rate	32Kbps~2Mbps
Video	Resolution	2304×1296	Stream Type	Variable bit rate
	Dual Stream	Live high-definition broadcasting, video playback (main stream), video standard-definition broadcasting (sub-stream)		
	Frame Rate	20 frames	Audio	Two-way voice
	Audio Compression Standard	G.711A		
	Storage	Supports SD card (Max. 128G), cloud storage (7 days of free cloud storage in China for 3 months, 1 month of free cloud storage overseas)		
Network	Network Interface Protocol	Private	Communication Protocol	IPv4, TCP/IP, DHCP, DNS, MQTT, P2P
	Frequency Range	2.4G Hz	Wireless Standard	IEEE802.11b/g/n
Intelligent alarm	Intelligent Alarm Trigger Wake-up	PIR	Intelligent Detection	Motion detection and human form alarm
	Detection Sensitivity	PIR (1-10, default 8), motion detection (1-10, default 6)	Remote Wake-up	Supports
	Image Output Time	Within 2s	Alarm Video	Can be set to record for 10S, 20S, 30S independently
	Information Push	Supports mobile phone and tablet APP alarm push		
	Alarm Type	None		
Battery	Battery Sleep	Can independently set the sleep state time, 10S (default), 20S, 30S, and Active mode	Working Time	6 months (10 wake-ups per day)
	Standby Current	200uA	Operating Current	200mA (420mA under night vision)
	Battery Capacity	6700mAh (rechargeable)	Power Supply	Battery / DC 5V/1A
General	One-click Reset	Support	Working Temperature And Humidity	-20 ℃ to 55 ℃ , humidity less than 90% (non-condensing)
	Protection Level	IP66	Dimensions (mm) / Weight (kg)	52mm x 65mm x 102mm / ≤0.3kg (bare machine)

8CH 2K HD AI Human WiFi NVR

- Maximum 8-channel 3.0MP15fps decoding
- Supports HDMI simultaneous output, and 3.5mm audio output
- Supports multiple storage methods such as 2.5-inch hard drive and local SD card storage
- This product adopts a Mini package design, occupies a small space, easy to place, and supports indoor and outdoor IPC access
- Maximum support for 8CH 3MP 2K battery camera wireless adaptive access, preview, storage, and playback



Series J WiFi NVR

HD WiFi NVR				
Output	Maximum Resolution	3MP	HDMI Output	1920×1080/1280×1024/1024×768
	Video Compression Standard	IP channel supports 3.0Mp H.265+	Video Encoding Resolution	3.0MP/1080P
Audio and Video	Video Bit Rate	32Kbps~1.5Mbps	Stream Type	Variable bitrate
	Dual Stream	Supports dual stream network transmission (PC, MacBook, and APP)	Audio Compression Standard	G.711a
	Synchronous Playback	4 channels	Image Settings	Supports brightness, saturation, color, and other settings for front-end cameras
	Antenna	Dual antenna	Wireless Standard	IEEE802.11b/g/n
Wireless	Frequency Range	2.4 GHz	Channel Bandwidth	20MHz
	Transmission Rate	32.5Mbps	Channel Selection	Supports 1-13 channels and other (14 channels) selection
	Region Selection	Supports MKK EU FCC selection		
	Transmission Distance	Single-camera open space straight line (non-cascade) 300 meters, multiple camera open space straight line (non-cascade) 150 meters,Multiple cameras transmit through walls (non-cascade) 50 meters. The actual transmission distance depends on the complexity of the environment		
	Recording Modes	Supports TF card (up to 1TB)	Backup Modes	Regular backup, event backup
Recording	Playback Mode	real-time playback, regular playback, event playback, and alarm playback		
	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol	IPv4, NTP (network time calibration), SMTP (mail service), RTSP, UDP
	Client	AVSS supports Windows systems (Windows XP, Windows 7, Windows 8, Windows 10), MacBook	Mobile Phone	Supports Android and iOS systems
Smart Alarm	Permissions	Support for different levels of device permissions (channel access, playback, remote viewing specific channel permissions)		
	Email Alert	Support (supports sending screenshots via email, with attachments being main stream images)	Motion Detection	Support, can set motion detection range and sensitivity from 1-8 (system default is 3)
	Alarm Push	App notification on motion detection		
	Upgrade	Support	Sleep Timer Settings	Can be set to 10 seconds, 20 seconds, 30 seconds, or continuous (no sleep), system default is 30S
Interface	Network Interface	1, RJ45 10M/100M adaptive Ethernet port	Audio Output	Via 3.5mm audio interface
	USB Interface	2x USB 2.0		
General	Power Supply	DC5V/1A	Operating Temperature	-10℃ to 55℃
	Power Consumption	5W	Operating Humidity	10% to 90%
	Dimensions	120mm x 120mm x 44mm	Weight	≤0.5kg (bare machine)

WiFi 6
Security Camera System

Ansjer WiFi security camera system incorporates WiFi 6 technology that revolutionize wireless surveillance system with faster speed and lower latency. Arm and manage your entire security system in on intuitive Ansjer Smart App from anywhere.



C280

- 5MP 1/2.7" CMOS sensor with soft light detection.
- Strong anti-interference, ensuring stable WiFi transmission
- Smart night vision, seeing full color images in day & night
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- 24/7 surveillance, audio & video recording
- Supports up to 5TB HDD High-capacity local storage
- WiFi 6 technology, faster speed and lower latency
- AI human & motion detection, catching the suspicious situation quickly



C280+S WiFi NVR

5MP HD Camera			
Camera	Camera Pixel	5MP	Image Sensor
	Shutter	Adaptive shutter	Lens
	Lens Interface Type	M12	Minimum Illumination
	White Light	4pcs White light lights	Day And Night Conversion Mode
	Infrared Distance	4pcs Infrared lights / 20m	ICR infrared filter type
Compression Standard	Video Compression Standard	H.265 Main Profile	Video Compression Bitrate
	Audio Compression Standard	G.711A	Two levels of HD and SD, with adaptive bitrate
Image	Maximum Image Size	2880*1624	Frame Rate
	Image Settings	Brightness, contrast, saturation, and sharpness adjustments	Privacy Masking
Performance	Intelligent Alarm	Intelligent motion detection, human detection	Audio Input
	Audio Output	Built-in Speaker	Wide Dynamic Range
	Digital Noise Reduction	3D digital noise reduction	Strong Light Suppression
	Backlight Compensation	Support	Browser
Interface	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Reset Button
	Storage	Micro SD card (≤256G)/HDD	Network Indicator Light
WiFi	Wireless Standard	IEEE 802.11b/g/n/ax 1T1R	Frequency Range
	Channel Bandwidth	Supports 20MHz	Image Bit Rate
	Network Protocol	TCP/IP, HTTP, DHCP, DNS, MQTT, P2P, RTSP, onvif	Voice Assistant
General	Operating Temperature and Humidity	-10℃ to 60℃, humidity less than 95% (non-condensing)	Power Supply
	Material	Plastic	Protection Level
	Size (mm)	120*86*126	Weight

8CH 4K HD AI WiFi NVR

- IEEE 802.11A/G/N/B compliant, supports up to 8 WiFi 2.4G cameras with 4-channel simultaneous decoding.
- Receives up to 8 video streams, with an auto-optimization algorithm for stable data transmission.
- H.265+ & AVBR tech improves transmission and storage efficiency by 20%.
- HDMI (up to 4K) and VGA output with 2K resolution.
- Decodes up to 8 channels at 5.0MP 15fps or 4 channels at 4K.
- 10+ language options.
- Remote management of IPC functions, including remote upgrades for front-end IPCs.



S Series WiFi NVR

HD WiFi NVR				
Output	CVBS Output	None	Audio Output	HDMI
	VGA Output	1920×1080, 1280×1024, 1024×768	HDMI Output	2560*1440, 1920×1080, 1280×1024, 1024×768
Audio and Video	Video Compression Standard	IP channel supports 5.0MP H.265	Video Decoding Resolution	2880*1624
	Stream Type	Fixed stream/variable stream		
	Dual Stream	Supports dual stream network transmission (PC, MacBook, and APP)	Audio Compression Standard	G.711a
	Synchronous Playback	4 channels	Image Settings	Supports brightness, saturation, color, and other settings for front-end cameras
WiFi	Antenna	Dual antenna	Wireless Standard	IEEE802.11b/g/n
	Frequency Range	2.4 GHz ~ 2.4835 GHz	Channel Bandwidth	20MHz
	Transmission Rate	11b: 11Mbps,11g :54Mbps,11n :150Mbps	Device Addition	Supports direct wired connection between wireless IPC and WiFi NVR
	Region Selection	US		
	Transmission Distance	200m in open areas, 100m with obstacles		
HDD	Type	1 SATA interface	Maximum Capacity	Supports up to 5TB capacity
	Recording Modes	Manual Recording, Scheduled Recording, Smart Detection Recording	Backup Modes	Normal backup, event backup
Recording	Playback Mode	Instant Playback, Regular Playback, Event Playback, Alarm Playback		
	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol	IPv4, NTP (network time synchronization), SMTP (Email service)
	Client	AVSS supports Windows systems (Windows XP, Windows 7, Windows 8, Windows 10), MacBook	Mobile	Supports Android and iOS systems
	Permissions	Supports different levels of device access permissions (channel access, video playback, remote viewing of specific channel permissions)		
Intelligent Alarm	Email Alert	Email sending screenshots with main stream images as attachments	Motion Detection	Motion/Person/Vehicle
	Alarm Push	App notification on motion detection		
Interface	Network Interface	1 RJ45 10M/100M adaptive Ethernet port		
	USB Interface	1x USB 2.0	Alarm Input / Alarm Output	0
General	Power Supply	DC12V/2A		
	Operating Temperature	-20°C to 60°C	Operating Humidity	Humidity less than 95% (non-condensing)
	Dimensions	181*136*26.5mm	Weight (Including 1T Hard Disk)	348g (include 1TB HDD)

Pan & Tilt WiFi 6 Security and Surveillance System

Enhance your entire home’s security with our WiFi 6 camera system. Offering fast, stable connections and crystal-clear 5MP/8MP video, it provides 360°full coverage for every corner. With advanced AI detection and 24/7 monitoring, it delivers comprehensive protection for your home, inside and out.



C296B

- Strong anti-interference, ensuring stable WiFi transmission
- Smart night vision, seeing full color images in day & night
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- DIY audio alarms, smart defense
- Supports Micro SD Card & Cloud versatile storage
- WiFi Halow™ connection, super-powerful signal penetration
- 5MP super- clear pixels, enjoying fineness and outstanding videos
- AI human & motion detection, catching the suspicious situation quickly



C296B+U WiFi NVR

Aurora Lux
WiFi 6 Camera System

Unlock true color clarity with our advanced security camera featuring an ultra-large F1.0 aperture and AI-ISP technology for stunning low-light performance. Powered by a 4.0 TOPS NPU, it delivers precise AI detection, ensuring top-tier home protection with full-color monitoring day and night.

5MP HD Camera			
Camera	Resolution	5MP	Lights
	Lens	4mm@F2.0	6pcs Infrared lights 4pcs White light lights
	Lens Interface Type	M12	Viewing Angle
	Image Sensor	1/2.7" Progressive Scan CMOS	Horizontal 90° Horizontal 355°
	Night Vision Distance	20m	Rotation
	Day/Night Mode	ICR Infrared Filter	Vertical 95°
	Digital Noise Reduction	3D Digital Noise Reduction	Infrared Wavelength
			850nm
AI Algorithms	Motion Detection	Supported	Illumination Threshold
	Human Detection	Supported	Soft Light Sensitivity: Day to Night < 2Lux; Night to Day > 4Lux
	Vehicle Detection	Supported	Backlight Compensation
	Perimeter Detection	Supported	Supported
Interface/Button	Wired Network Port	Supported	Strong Light Suppression
	Storage	Micro SD card (≤256G)/cloud storage (for stand-alone use), HDD	Supported
	Audio Input	Built-in High-Sensitivity Microphone	Audio Output
	Video Compression Standard	H.265	Built-in Speaker
Image	Maximum Image Size	2880*1620	Reset Button
	Image Bit Rate	2000kbps	Button
	Image Settings	Brightness, contrast, saturation, and sharpness adjustments	
	Wireless Standard	Supported	Audio Compression Standard
WiFi	Frequency Range	IEEE 802.11b/g/n/ax 1T1R	G.711A
	Network Configuration	AP hotspot configuration	Channel Bandwidth
	Protocols	TCP/IP,HTTP,DHCP,DNS, MQTT, P2P, RTSP, onvif	20MHz
	Material	Metal front cover + plastic housing	Bluetooth
Network	Ingress Protection	IP66 Waterproof	N/A
	Operating Temperature and Humidity	-20°C to 60°C, humidity less than 95% (non-condensing)	Voice Assistant
			Alexa not supported
			Power Supply
General			DC12V/1A
			Weight (g)
			610
			Dimensions (mm)
			Wall mount: 160mm (L) x 140mm (W) x 240mm (H) Ceiling mount: 120mm (L) x 140mm (W) x 282mm (H)



C186A

- 5MP 5/8MP HD pixels for clearer image quality
- Smart mesh WiFi technology, one network for entire home
- Smart night vision, seeing full color images in day & night
- Two-Way audio, easy intercom anytime, anywhere
- Light & Siren alarm, proactive defense
- 24/7 surveillance, audio & video recording
- Supports up to 8TB HDD High-capacity local storage
- AI human & motion detection, catching the suspicious situation quickly
- Ultra-long distance signal transmission, stable WiFi connection



C186A+U WiFi NVR

3MP HD Camera			
Camera	Resolution	5MP / 8MP	Supplementary Light Brightness
	Lens	4.0mm@F1.0	Two Modes: Automatic Adjustment, Manual Adjustmen
	Viewing Angle	Horizontal 90°	Light Power
	Lens Interface Type	M12	1W
	Image Sensor	1/3" sensor / 1/2.8" sensor	Luminous Flux
	Lights	3pcs Warm Lights	140lm
	Night Vision Illumination Mode	Full-Color Night Vision	Luminous Flux
	Supplementary Light Control Mode	Three Lighting Modes: Auto Mode: Automatically turns lights on/off based on ambient light levels Forced Mode: Lights remain on or off as set Scheduled Mode: Set specific start and end timesfor lighting	4500K
		Privacy Masking	3D Digital Noise Reduction
AI Algorithm Features	Motion Detection	Supported	Supported
	Human Detection	Supported	Up to 5 Customizable Zones
Interface/Button	Wired Network Port	Supported	Custom Alarm Voice/Two-Way Audio
	Storage	Hard Disk	Supported
	Audio Input	Built-in High-Sensitivity Microphone	
	Video Compression Standard	G.711A	
Image	Maximum Image Size	2880*1620	Vehicle Detection
	Frame Rate	25fps / 15fps	Perimeter Detection
	Wireless Standard	IEEE 802.11b/g/n 1T1R	Intrusion Detection/Departure Detection/Absence Detection/Entrv/Exit Detection/Loitering Detection
WiFi	Frequency Range	2.4 GHz/5GHz	Audio Output
	Network Configuration	Private Protocol	Built-in Speaker
	Network Configuration	Private Protocol	Button
General	Material	Metal	Reset Button
	Ingress Protection	IP66 Waterproof	
	Operating Temperature and Humidity	-20°C to 60°C, humidity less than 95% (non-condensing)	

8CH Outdoor 2K HD AI Human WiFi NVR

- IEEE 802.11A/G/N/B compliant, supports up to 8 WiFi 2.4G cameras with 4-channel simultaneous decoding.
- Receives up to 8 video streams, with an auto-optimization algorithm for stable data transmission.
- Maximum 8-channel WiFi IPC adaptive access.
- H.265+ & AVBR tech improves transmission and storage efficiency by 20%.
- Supports 5MP HD network video access, preview, storage, and playback.
- HDMI (up to 4K) and VGA output with 2K resolution.
- Decodes up to 8 channels at 5.0MP 25fps or 4 channels at 4K.



Series U WiFi NVR

HD WiFi NVR			
Video and Audio Codec	VGA Output	1920×1080 , 1280×1024 , 1024×768	HDMI Output
	Video Compression Standard	IP channel support, 5.0Mp H.265+	3840*2160, 2560*1440, 1920×1080 , 1280×1024 , 1024×768
	Video Decoding Resolution	2880*1624	Synchronous Playback
Wireless Parameter	Antenna	Dual Antennas	4 Channels
	Wireless Standard	IEEE802.11b/g/n	Image Settings
	Frequency Range	2.4 GHz ~ 2.4835 GHz	Brightness, saturation, and color adjustments for front-end cameras
	Channel Bandwidth	20MHz	Transmission Rate
Hard Drive	Type	1 SATA port	11b: 11Mbps,11g :54Mbps,11n :150Mbps
	Maximum Capacity	8TB	Device Addition
Recording	Recording Mode	Manual Recording, Scheduled Recording, Smart Detection Recording	Transmission Distance
	Playback Mode	Instant Playback, Regular Playback, Event Playback, Alarm Playback	200m in open areas, 100m with obstacles
Network Management	Wired Interface	1 RJ45 10M/100M Adaptive Ethernet Port	
	Network Protocol	IPV4, NTP (Network Time Protocol), SMTP (Email Service)	Micro SD card
	Client	AVSS supports Windows systems (Windows XP, Windows 7, Windows 8, Windows 10) and MacBook	Not supported
Intelligent Alarm	Intelligent Detection	Motion/Person/Vehicle	Backup Mode
	Alarm Push	Support App push upon detection	Regular Backup, Event Backup
	Email	Email sending screenshots with main stream images as attachments	
General	Material	Plastic	
	Ingress Protection	Non-waterproof	Power Supply
	Operating Temperature and Humidity	-20°C to 60°C, humidity less than 95% (non-condensing)	DC12V/2A

04

Smart AI DVR

AI DVR System

It is time to upgrade your analog security camera system, Ansjer newly developed analog security system offer a leading-edge home & business surveillance, incorporating the latest AI technology to provide more secure 24/7 local or remote connectivity.



C161

- 2MP Full HD, delivering smooth & clear videos
- Built-in microphone, one-way audio pick-up
- AI-powered Human & Vehicle detection
- Advanced H.265+ Video compression format
- 24/7 surveillance, audio & video recording
- Supports up to 8TB HDD High-capacity local storage



C161+U DVR

2MP HD Camera				
Camera Lens	Sensor Type	2.0 Mega Progressive Scan CMOS	Signal System	PAL/NTSC
	Effective Pixels	3.6mm @ F2.0 90°	Electronic Shutter	1/15 second to 1/50,000 second
	Minimum Illumination	0.1Lux @ (F1.2, AGC ON), 0 Lux with IR	Lens	3.6mm
	Lens Type	M12	Day And Night Switching Mode	ICR infrared filter type
	Frame Rate	2.0Mp @15fps		
Camera Features	Wide Dynamic Range	79dB	High-definition Video Output	1 channel BNC coaxial high-definition, in compliance with HDTVI standards
	Automatic Gain	Supported	Maximum Signal-to-noise Ratio	36dB
	Noise Reduction	3D noise reduction	Image Color	Daytime color/black and white at night (when infrared is turned on)
	Backlight Compensation	Supported		
General	Operating Temperature And Humidity	-20 C to 60 C , humidity less than 90% (non-condensing)	Power Supply	DC12V 500mA
	Audio Compression Standard	30 meters	Power Consumption	6W MAX
	Protection Level	IP66	Communication	Coaxial control
	Material	Metal	Size (mm)	72.5mm x 184mm
	Weight	≤0.34kg (bare machine)		

C303

- 2MP 2MP Full HD, delivering smooth & clear videos
- Built-in microphone, one-way audio pick-up
- AI-powered Human & Vehicle detection
- Advanced H.265+ Video compression format
- 24/7 surveillance, audio & video recording
- Supports up to 8TB HDD High-capacity local storage



C303+U DVR

2MP HD Camera				
Camera	Sensor Type	2.0 Mega Progressive Scan CMOS	Signal System	PAL/NTSC
	Effective Pixels	3.6mm @ F2.0 90°	Shutter	1/15 second to 1/50,000 second
	Minimum Illumination	0 Lux with IR	Lens	3.6mm
	Lens Type	M12	Day/Night Mode	ICR infrared filter type
	Frame Rate	2.0Mp @15fps	HD Video Output	1 channel BNC coaxial HD, compliant with HDTV standard
Features	Wide Dynamic Range	79dB	Maximum Signal-to-Noise Ratio	36dB
	Automatic Gain	Supported	Image Color	Daytime color/black and white at night (when infrared is turned on)
	Noise Reduction	3D noise reduction	White Balance	Automatic
	Backlight Compensation	Supported		
PIR	Quantity	1	Effective Angle	90°
	Effective Distance	8-10m		
Features	Quantity	1	Power	0.2W
	Speaker	1	Power	1.1W
	Audio Input	1 microphone		
	Operating Temperature And Humidity	-20 C ~60 C , humidity less than 90% (no condensation)	Power Supply	DC12V 500mA
	Software Support	30 meters	Power Consumption	6W MAX
	Protection Level	IP66	Communication	Coaxial vision control
	Material	Metal	Size (mm)	85mm x 72.5mm x 145mm
	Weight	≤0.220kg (bare machine)		

8CH Outdoor 2MP HD AI Human AI Vehicle DVR

- DVR supports preview, storage, and playback
- Search and playback recorded files
- Supports P2P access platform
- Supports 10 or more languages
- Supports volume adjustment during image preview and playback
- Compliant with HDTV standard specifications, supporting adaptive access to HDTV/CVI/AHD/CVBS cameras



Series U DVR

HD DVR				
Video & audio	Video Input	8 BNC interfaces (level: 1.0Vp-p, impedance: 75 Ω) PAL/NTSC adaptive	Audio Input	Eight coaxial audio
	Audio Output	3.5MM audio interface (linear level, impedance: 600Ω)	VGA Output	1920×1080/1280×1024/1280×720/1024×768
	HDMI Output	1920×1080/1280×1024/1280×720/1024×768		
Recording	Video Compression Standard	2.0Mp H.265/H.265+	Video Encoding Resolution	1080P/960H
	Video Bitrate	32Kbps~10Mbps	Stream Type	Variable bitstream
	Dual-stream	Supports dual-stream network transmission (PC, MacBook, APP)	Audio Compression Standard	Analog G.711a
	Synchronous Playback	4 channels		
	Analog Image Settings	Supports brightness, saturation, color, and other settings for front-end cameras		
Recording Mode	Hard Drive	3.5-inch SATA interface, supports up to 8TB capacity (thickness requirement within 20MM)		
	Recording Mode	Manual recording, timed recording, motion detection recording, and alarm recording	Playback Mode	Instant playback, normal playback, event playback, and alarm playback
	Backup Mode	Regular backup, event backup		
Network	Wired Interface	1 RJ45 10M/100M adaptive Ethernet port	Network Protocol	IPv4, TCP/IP, NTP (network time calibration), SMTP (email service)
	Client	AVSS supports Windows system (Windows XP, Windows 7, Windows 8, Windows 10), MacBook	Mobile	Supports Android and iOS systems
	Authorization	Supports different levels of device operation permissions (channel access, recording playback, remote viewing specific channel permissions)		
Intelligent Alarm	Detection Type	Motion detection, PIR detection, human shape detection, vehicle shape detection	Alarm Push	App notification on motion detection
	Email Alarm	Supports sending screenshots via email, attachments are sub-stream images		
Interface	Network Interface	1 RJ45 10M/100M/1000M adaptive Ethernet port		
	USB Interface	2x USB 2.0		
General	Power Supply	DC12V 2A	Power Consumption	≤10W
	Operating Temperature	-10℃~+60℃	Operating Humidity	10%~90%
	Size (mm)	273mm×187mm×39mm	Weight	≤0.95Kg (bare machine)


About Us

Loocam is a company with independent research and development, production and sales system, focusing on the fields of whole house smart home, smart community, smart building, etc., and has been committed to providing the market with comprehensive intelligent control system products and integrated solutions.

Through continuous innovation, we will bring leading products full of scientific and technological charm to global consumers, and promote the beauty of intelligent manufacturing of Loocam brand. At present, it has business presence in more than 100 countries and regions around the world.

Since its establishment, Loocam has been committed to fully integrating technology and scenario applications, designing and innovating product solutions close to users, and providing smart scenarios for the whole house, allowing people to enjoy an easy, comfortable and enjoyable life brought by technology in a safe, convenient and green living environment created by smart technology.

Smart Network Solution

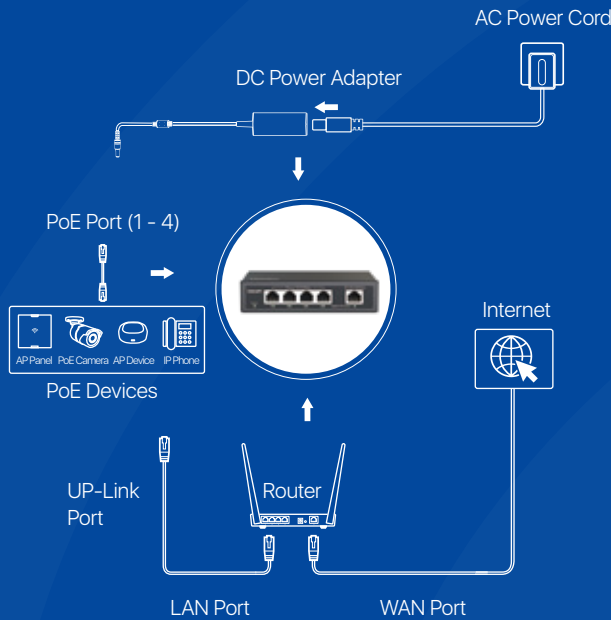

4-Channel PoE Switch



Product Specification			
Type	5-channel Gigabit Switch - 4-Port POE	Protocol	IEEE802.3, IEEE 802.3af/at, IEEE 802.3az, IEEE802.3x
Ports	4x10/100/1000Mbps RJ45 poe port; 1x10/100/1000Mbps uplink port	Port Category	MDI-MDIX auto-flip
Network Media	10BASE-Tc UTP Category 3, 4, 5 cable (up to 100m)100BASE-TX UTP Category 5, 5e cable (up to 100m)1000BASE-T UTP Category 5, 5e, 6 or higher cable (max. 100m)**	Transmission Rate	Ethernet: 10Mbit/s (full duplex)Fast Ethernet:100Mbit/s (full duplex) Gigabit Ethernet:1000Mbit/s (full duplex)
POE Mode	RJ45 port support power supply, whole power XX W,single port maximum output power af:15.4W at:30W	MAC Address Table	2K
MAC Address Learning	Automatic learning, aging	Switching Capacity	10Gbps
Packe Forw-rding Rate	7.4Mpps (64 byte packet size)	SRAM Storage	128kb
Jumbo Frame	9 kb	Network	IPv4/IPv6
Power Specification	AC 100V-230V 52V/2.5A	Casing	Metal material
Heat Dissipation Method	Natural heat dissipation, no fan	Operating Temp and Humidity	0℃~40℃, humidity less than 90% (no condensation)

16-Channel PoE Switch



Main Module			
Chipset	EASY7085(GSM140)	POE Power Supply Module	LC2683
Network			
Port-based Rate	Downlink 10/100/1000Mbps, Uplink 10/100/1000Mbps	Port Type	Network Port
Number of Ports	18 (16 downlink ports, 2 uplink ports)	POE Power Interface Protocol	IEEE 802.3af, IEEE 802.3at, IEEE 802.3az
MAC Address Table	2K	VLAN Address Table	4K
Number of Supported Device Connections	Up to 16 device connections	Network Protocol	Support IPv4/IPv6 access
Network Standard	IEEE 802.3	Communication Security	User authentication, software encryption
General			
Power Supply	DC 48V/power supply	Indicator Lights	Network indicator, power indicator
Operating Temp and Humidity	~20℃~50℃, humidity less than 90% (no condensation)		

8-Channel PoE Switch



Product Specification			
Type	10-channel Gigabit Switch - 8-Port POE	Protocol	IEEE802.3, IEEE 802.3af/at, IEEE 802.3az, IEEE802.3x
Ports	8x10/100/1000Mbps RJ45 poe port; 2x10/100/1000Mbps uplink port	Port Category	MDI-MDIX auto-flip
Network Media	10BASE-Tc UTP Category 3, 4, 5 cable (up to 100m)100BASE-TX UTP Category 5, 5e cable (up to 100m)1000BASE-T UTP Category 5, 5e, 6 or higher cable (max. 100m)**	Transmission Rate	Ethernet: 10Mbit/s (full duplex)Fast Ethernet:100Mbit/s (full duplex) Gigabit Ethernet:1000Mbit/s (full duplex)
POE Mode	RJ45 port support power supply, whole power XXW single port maximum output power af:15.4W at:30W	MAC Address Table	2K
MAC Address Learning	Automatic learning, aging	Switching Capacity	10Gbps
Packe Forw-rding Rate	7.4Mpps (64 byte packet size)	SRAM Storage	128kb
Jumbo Frame	9 kb	Network	IPv4/IPv6
Power Specification	AC 100V-230V 52V/2.5A	Casing	Metal material
Heat Dissipation Method	Natural heat dissipation, no fan	Operating Temp and Humidity	0℃~40℃, humidity less than 90% (no condensation)

24-Channel PoE Switch



Product Specification			
Type	26-channel Gigabit Switch -24-Port POE	Protocol	IEEE802.3, IEEE 802.3af/at, IEEE 802.3az, IEEE802.3x
Interface	24x10/100/1000Mbps RJ45 PoE Port; 2xGigabit SFP uplink port;	Port Category	AUTO MDI/MDIX
Network Media	10BASE-Tc UTP category 3, 4, 5 cable (Maximum 100m)100BASE-TX UTP category 5, 5e cable (Maximum 100m)1000BASE-T UTP category 5, 5e, 6 or above cable (Maximum 100m)	Transmission Rate	Ethernet: 10Mbit/s (Full Duplex) Fast Ethernet: 100Mbit/s (Full Duplex) Gigabit Ethernet: 1000Mbit/s (Full Duplex)
POE Mode	PoE Ports: Port 1 - Port 24 PoE Power up to 250W for all PoE ports PoE Power up to 30W for each PoE port	MAC Address Table	16K
MAC Address Learning	Auto-Learning, Aging	Switching Capacity	52Gbps
Packe Forw-rding Rate	38.7Mpps (64 byte packet size)	SRAM Storage	128kb
Jumbo Frame	9 kb	Forwarding Mode	Store-and-Forward
External Power Supply	External Power Adapter (Output:DC 100-24V 50/60Hz 52V /5A)	Dimensions (W×D×H)	12.2"×3.7"×1.1 in (190mm×30mm×88mm)
Environment	Operating Temperature: -10°~50°; Operating Humidity: 10% ~ 90%RH, non-condensing;		

Home Security Alarm System





Home Security Alarm System

Gateway

The gateway is the connection center of the sensor. It connects other intelligent products through zigbee3.0 protocol with low power consumption, AD hoc network and self-recovery, which is safe and reliable.

Features

- Support alarm function;
- Supports deployment and disdeployment
- Supports up to 32 sub-devices.
- Support APP remote control and management;
- Built-in log management system, you can view device logs to more accurately locate problems and solve problems;



Specification

Working Voltage: DC5V External Type-C power adaptor;
Indicators: Yes, Display device status
Working Temperature: -10°C--+55°C
Working Humidity: ≤95% RH
Installation Methods: Desktop/Wall
OTA Upgrade: Support
Button: Yes, Can be used to restart the device/stop alarm
Alerts Push: Support



Door and window
sensor

The door and window sensor determines the opening and closing state of the door and window cabinet by drawing the magnet on the reed tube, reminds the user in time, and notifies the gateway through wireless signal, and has realized alarm and other intelligent scenarios;



Features


* This product can not use alone and need to work with Loocam Gateway.

- Anti-demolition design, accidental demolition timely alarm, more secure protection
- A new generation of low-power design, low voltage to remind users to replace the battery in time
- No installation tools, simple start the smart home journey
- Work with gateway, support linkage control and remote reminder;



Specification

Working Voltage: DC 3V
Indicator: Yes, Display device status
Wireless Type: Zigbee
Working Temperature: -10°C--+55°C
Working Humidity: ≤95% RH
Installation Methods: Fixed with 3M adhesive pad
Casing Material: PC+ABS
Magnetic distance: ≥20mm
Battery:CR2032

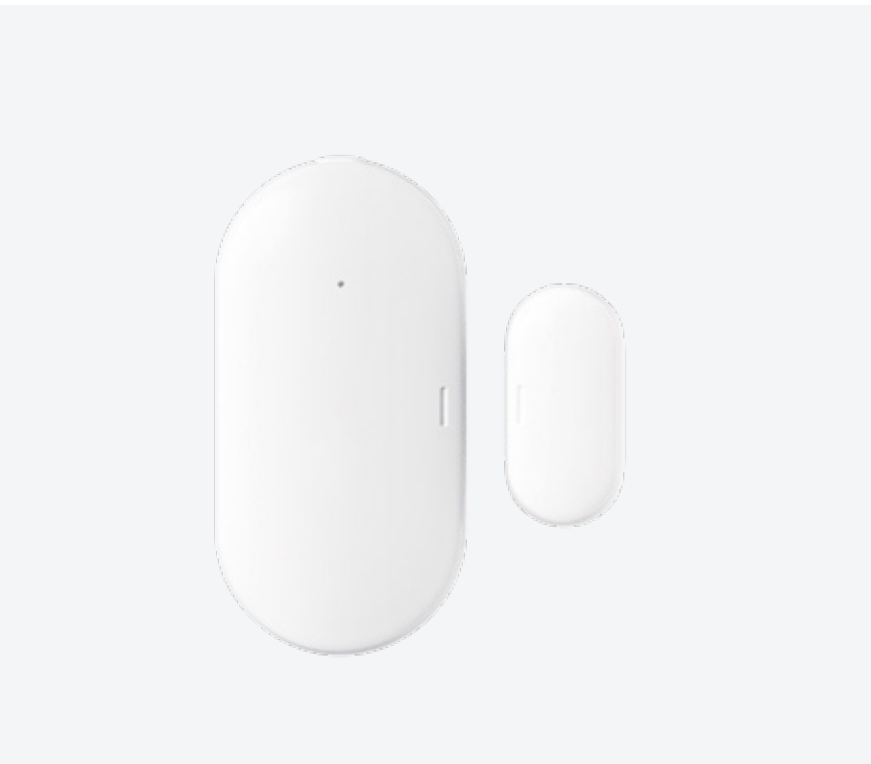

PIR Sensor

The PIR sensor detects the infrared light emitted by the human body through the four-element pyroelectric sensor and the new-generation Fresnel lens to judge whether someone is moving.



Features

* This product can not use alone and need to work with Loocam Gateway.

- Next-gen Fresnel lens with nano-level accuracy (0.00015mm), increasing defense area density by 3.4 times while reducing optical unit size by 10% for a compact and sensitive product.
- Stable operation with four-element sensor and temp compensation.
- Easy installation, compact design.
- Low power consumption, works with a gateway, supports linkage control and remote alerts.



Specification

Working Voltage: DC 3V
Indicator: Yes, Display device status
Wireless Type: Zigbee
Working Temperature: -10°C--+55°C
Working Humidity: ≤95% RH
Installation Methods: Wall-mounted/-Ceiling-mounted
Casing Material: PC+ABS
Detection distance: 7m
Detection Angle: 70°
Battery:CR123A



Water Leakage Sensor

The water leakage sensor detects the conduction status between the metal probes to determine whether there is flooding, water leakage, rain, etc. When the water overflows the two poles of the probe, it immediately sends a wireless alarm signal to the gateway to let the user know as soon as possible and reduce the loss.




Features

- Innovative double-sided design, the probe can face up to detect water leakage and rain, and the probe can face down to detect water immersion.
- Rotary open cover design, IP66 protection class, to ensure normal use in wet, dusty environment.
- Can be widely used in home, computer room, warehouse and other fields.



Specification

Working Voltage: DC 3V
Indicator: Yes, Display device status
Wireless Type: Zigbee
Working Temperature: -10°C---+55°C
Working Humidity: ≤95% RH
Installation Methods: Placement on the ground
Casing Material: PC+ABS
Weatherproof: IP66
Water-level detection: 0.5mm
Battery:CR123A

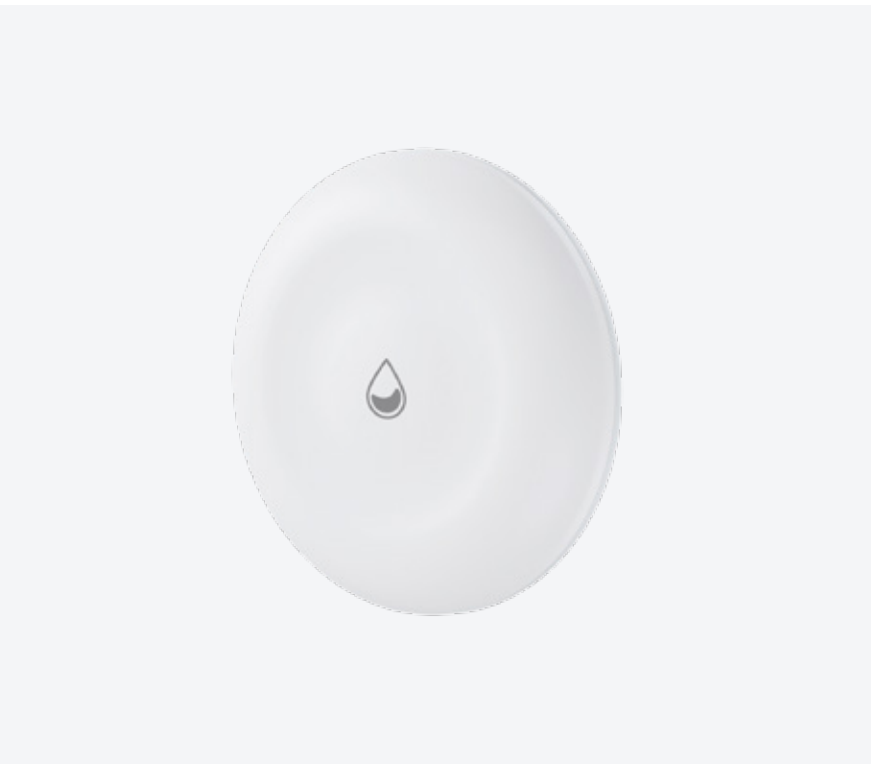

Temperature and Humidity
Sensor

The temperature and humidity sensor is mainly used to detect and record the ambient temperature and humidity in real time.



Features

* This product can not use alone and need to work with Loocam Gateway.

- The latest generation of iot sensors can accurately monitor changes in ambient temperature and humidity;
- Exclusive private model design, with a wider Angle of view LCD display screen, to achieve more excellent display effect;
- Intimate display of ambient temperature, humidity and comfort through numbers and ICONS;



Specification

Wireless Connection: Zigbee
Working Voltage: DC 3V
Humidity Accuracy: ±5% Max
Temperature Accuracy: ±0.3°C
Humidity Measuring Range: 0% ~ 100% RH
Temperature Measuring Range: -40 ~ +125°C
Casing Material: PC+ABS
Installation Methods: Flat on the table
Battery:AAA Battery



Smart Button

Unlike traditional fixed buttons, smart buttons are free of installation tools and can be placed at home.



Features

* This product can not use alone and need to work with Loocam Gateway.

- Four cantilever balanced structure design, any Angle can be triggered in time, better press experience;
- Multi-function: smart switch, emergency button, scene customization, etc
- One-click execution, can customize the function, convenient and fast
- No installation tools, immediately put and use



Specification

Working Voltage: DC 3V

Indicator: Yes, Display device status

Working Temperature: -10°C--+55°C

Working Humidity: ≤95% RH

Installation Methods: Flat on the table/Fixed with 3M adhesive pad

Casing Material: PC+ABS

Triggered Ways: Click/Double-click/Long press

Battery:CR2032



Smart Plug

A smart plug converts regular appliances into remotely controlled smart devices, enhancing convenience, safety, and energy efficiency in homes as part of a smart home ecosystem.



Features

- Remote Control: Manage device power remotely via a smart phone app.
- Timers and Scheduling: Set specific on/off schedules for energy efficiency and automation.
- Voice Control: Easily control connected devices with voice assistants like Amazon Alexa.
- Energy Monitoring: Keep track of device energy consumption for cost management.



Specification

Communication mode:
IEEE802.11b/g/n 2.4GHz/ Bluetooth

Rated voltage (Input):120V-60Hz

Maximum current (Output):10A Max

Maximum power:1200W

Overload protection:Support

Electricity statistics:Support

LED indicator:Yes

Physical On/Off Button:Yes

Ingress protection rating:IP54

